


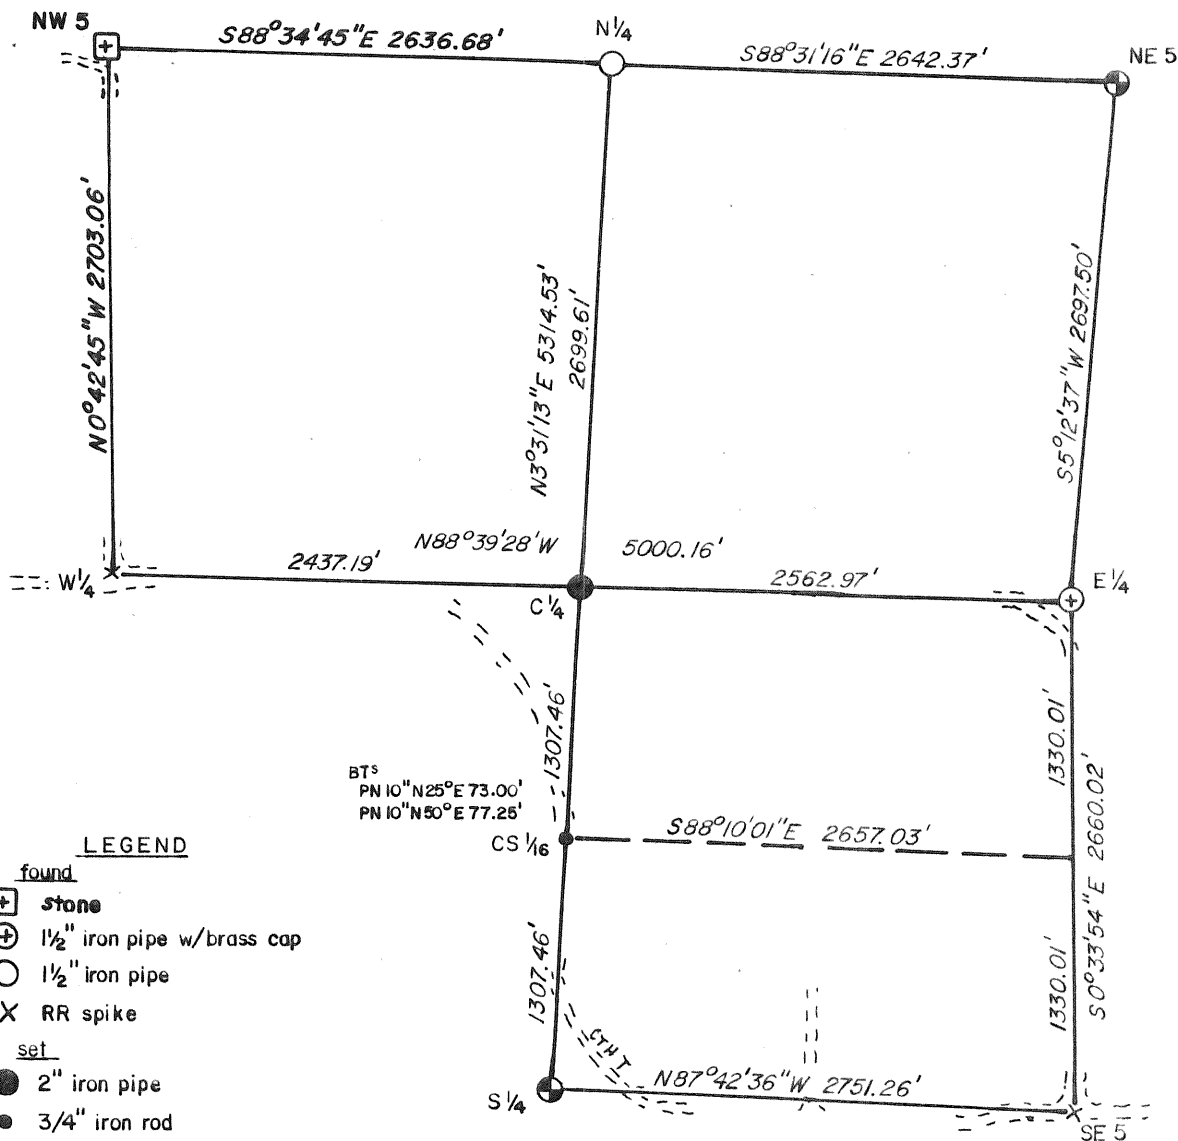

LEGEND

found

- ⊕ stone
- ⊕ 1/2" iron pipe w/brass cap
- 1/2" iron pipe
- X RR spike

set

- 2" iron pipe
- 3/4" iron rod

NOTE

Survey for Dept. of Natural Resources
Antigo Area Land Agent, Marvin Schmeiser.
Survey completed Feb. 13, 1990.

See Certified Corner Sheets on file at Register
of Deeds for corner reference information.

Field notes filed at D.N.R. Trout Lake Sta.
4125 Hwy M, Boulder Jct.

RECORD # 10039 (6 SHEETS)
LANGLAD COUNTY SURVEYORS OFFICE
DATE FILED: 6/4/93 BY: D.T.



I, Marvin E. Seymour, certify this map to be
correct to the best of my knowledge and belief.

Marvin E. Seymour March 12, 1990

NW 5 corrected revision 11/27/90 MEB


Rec'd 12-12-90 W.S. Kelly

T33N, R12E, Langlade Co.
Sec. 5; partial subdivision



Scale 1" = 1000'

Dr. by M. Seymour 3/12/90

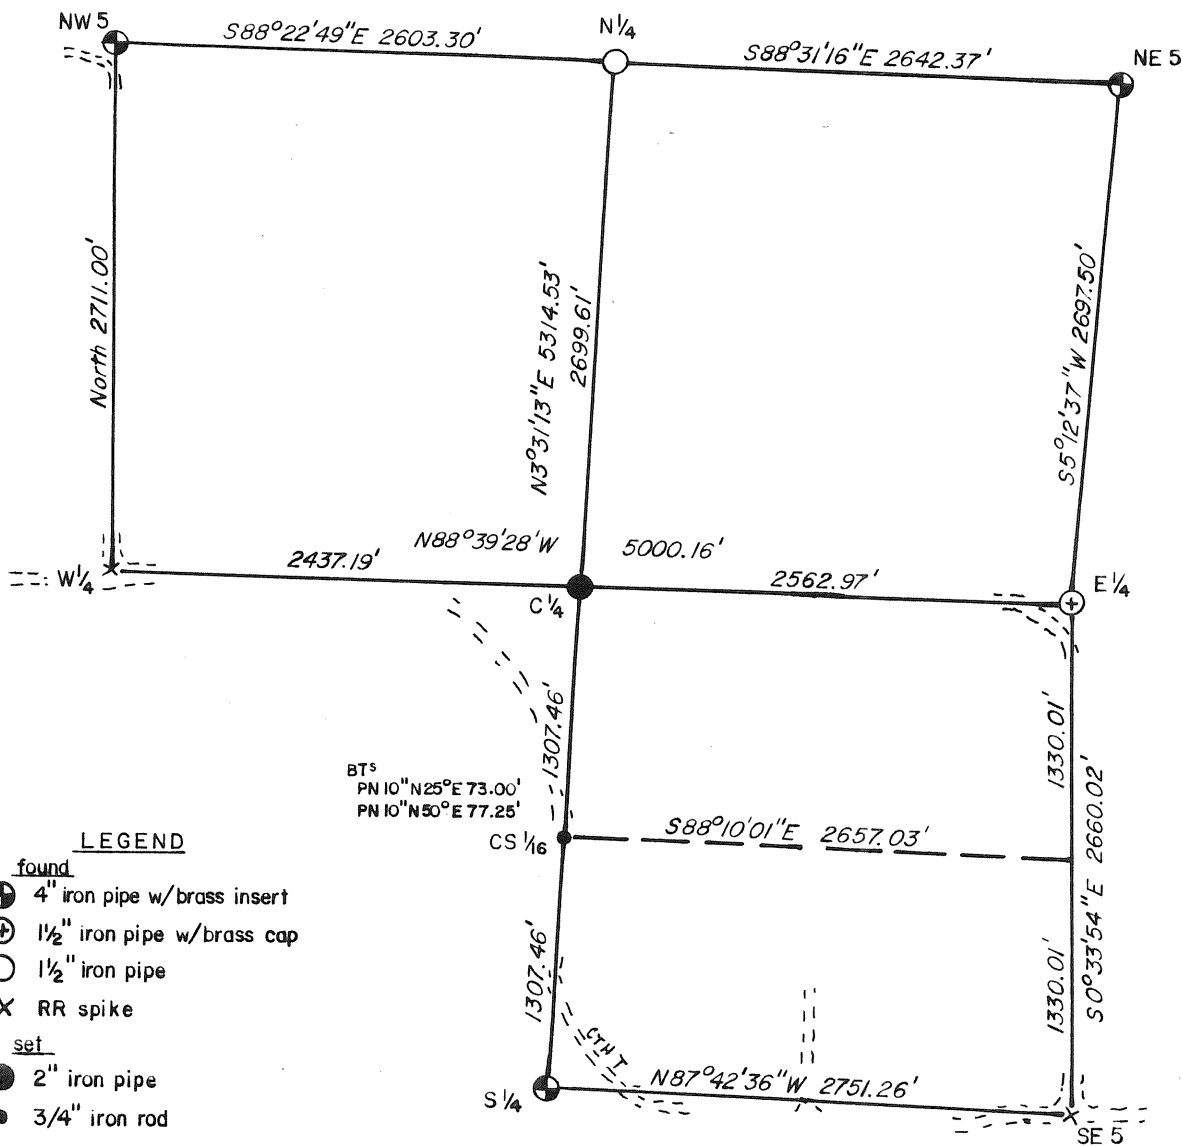

I, Marvin E. Seymour, certify this map to be correct to the best of my knowledge and belief.

Marvin E. Seymour March 12, 1990




Scale 1" = 1000'

Dr. by M. Seymour 3/12/90



Stock No. 26273

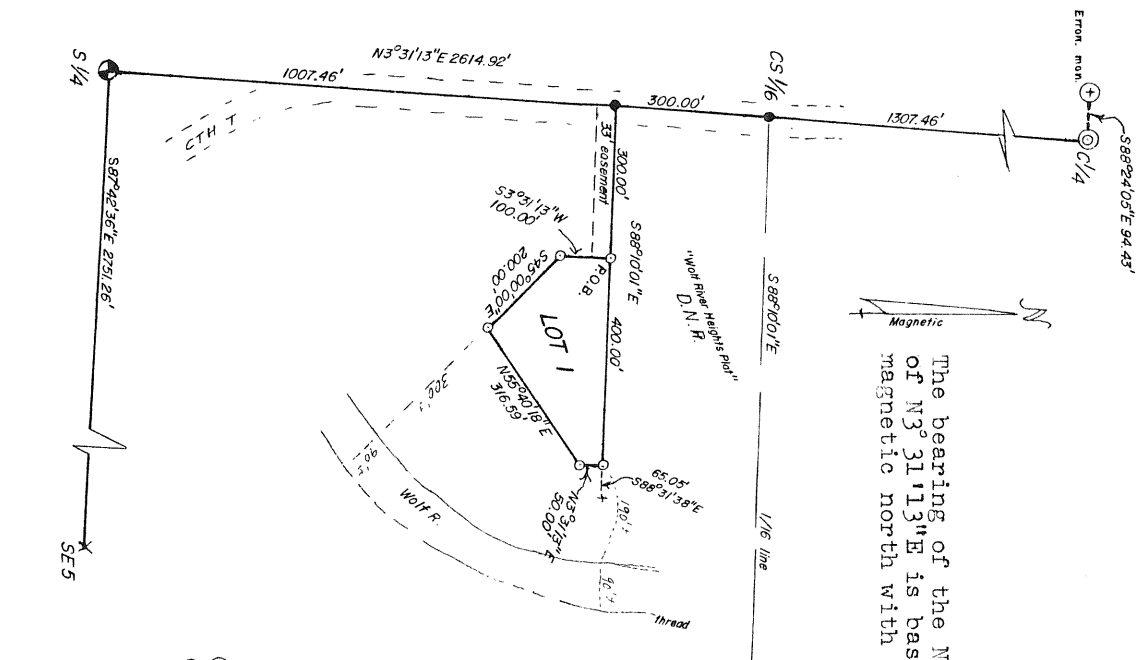

CERTIFIED SURVEY MAP NO. _____

VOLUME _____ PAGE _____

Dr. by: Marvin E. Seymour
Feb. 19, 1990

Located in the SW 1/4 SE 1/4, Sect 5, T 34N, R 12E
Town of Ainsworth, Langlade County WI

The bearing of the N/S 1/4 line
of N3°31'13"E is based on
magnetic north with 0° decl.

I, Marvin E. Seymour, Registered Land Surveyor,
hereby certify that I have surveyed and mapped a
parcel of land located in the SW 1/4 SE 1/4, Sect. 5,
T34N, R12E, at the request and under the direction
of Marvin L. Schmeisler, Dept. of Natural Resources
Antigo Area Land Agent, described as follows:


Commencing at the S 1/4 corner of Sect. 5; thence along the N/S 1/4
line N3°31'13"E, 1307.46 feet to the CS 1/16 corner (NW cor. of
said forty); thence returning S3°31'13"W, 300.00 feet; thence
parallel with the north line of said forty, S88°10'01"E, 300.00
feet to the POINT OF BEGINNING; thence parallel with the west
line of said forty S3°31'13"W, 100.00 feet; thence S45°00'00"E,
200.00 feet; thence N55°40'18"E, 316.59 feet; thence parallel
with the west line of said forty, N3°31'13"E, 50.00 feet; thence
parallel and 300 feet southerly of the north line of said forty
N88°10'01"W, 400.00 feet to the point of beginning, subject to
an easement for ingress and egress as shown on Document #251732
on file at the Langlade County Register of Deeds.

That said parcel contains 1.40 acres.

That I have complied with the applicable sections of Wisconsin
Statutes Chapter 236 and the Langlade County Land Division
Ordinance in surveying said lands.

LEGEND

- 3/4" round, set (temporary PK nail)
- 1" iron pipe, set
- ⊙ 2" iron pipe, set
- ⊕ 4" iron pipe w/ brass insert, found
- ⊕ 1 1/2" iron pipe w/ brass cap, found
- ⊕ 3/4" iron pipe, found
- X RR spike, found




NOTE: all monuments set are over
24" long and weigh min. 11.5 lbs. L.F.
Temp PK nails to be replaced after
frost is out of ground.

This map is a correct representation of
all of the exterior boundaries
of the land surveyed, and
is a part of the parcel
described in Deeds
Document #251732.



2/2/90
Seymour

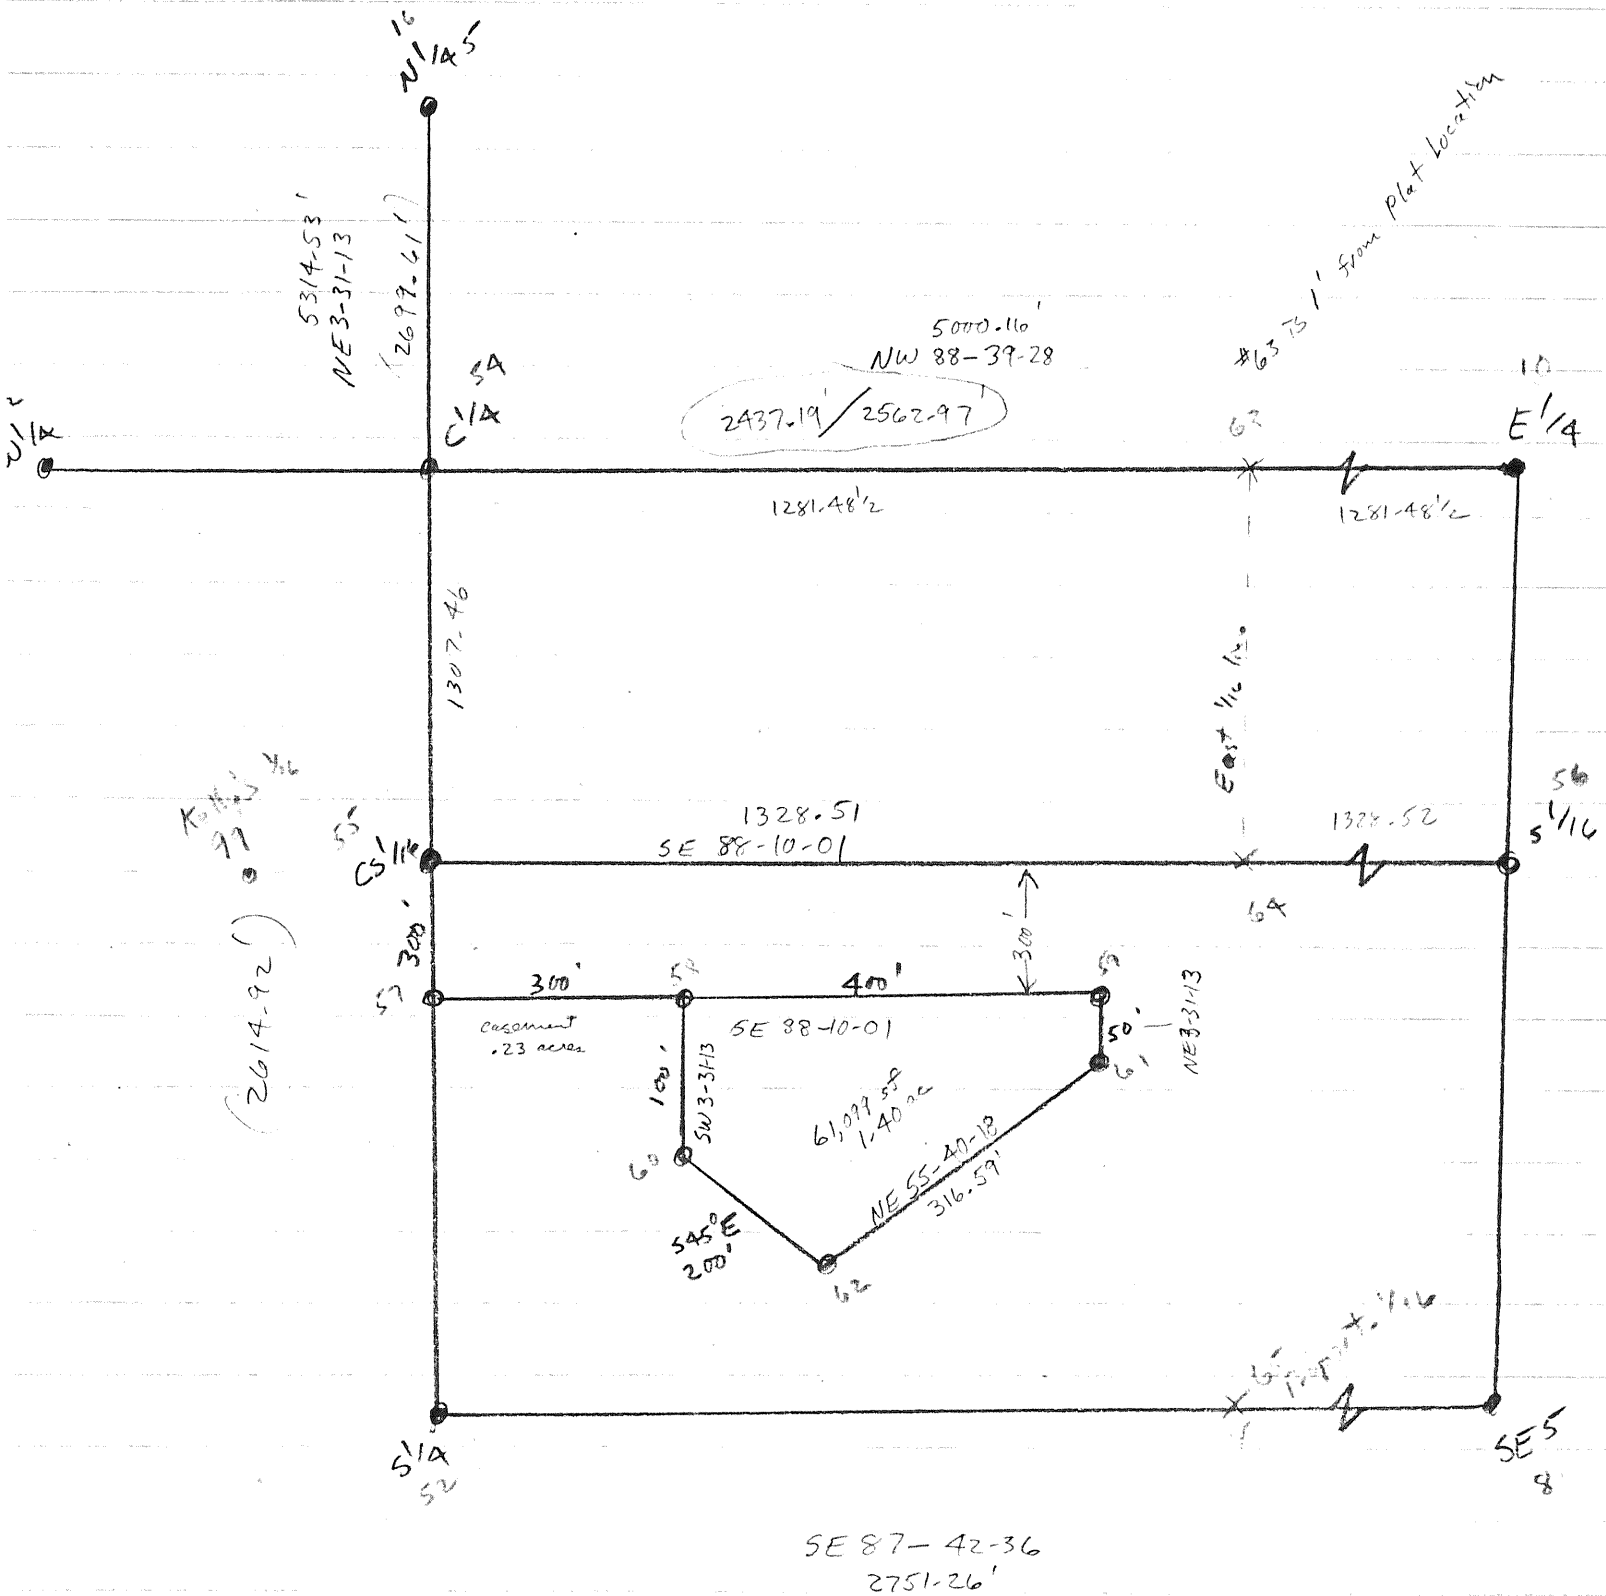

1/31/90
Leyman

NWS

NW 88-22-49,
2603-30

NW 88-31-16
2642.37'

NES

~~1/2~~ USE IT
P N/A S

South
2711-00

WIA
2

2342.75¹
NW 88-40-04

2657.40
NW 88-38-55

NE 5-12-37,
2697-50

$$E'_{1/2}$$

(NW 88-36-53)
1281-02')

#5 50' north 24' E. Sur 300 ft
West 9'
or nor 324' for 1/16
West 9'

2613-46
1-27-03

99
X 6
15 1631-77
SW 1-06-55
1
2 east
X

x 47

NW 0-33-54
2660-02'

1375-12'
SE 87-43-47

1376-14'
SE 87-41-26

51A
52

EVI 6
53

SE 5
8

To Set Monuments

2/2/90
Seegmuer

BS 4
Set a 5 turn 3-45-31 to #55 set a 5 left 161-52-20

44-03-55 to 4 57

121- 33-56

83-06-26 to #58

82-31-25

100-31-22 to #60

65-06-29

727.09¹) 85-32-18 to 59

