



Stock No. 26273

SHEET 1 of 4

CERTIFIED LAND CORNER RESTORATION & ESTABLISHMENT

BEING SECTION 10

Township 33 North, Range 14 East, Fourth Principal Meridian
LANGLADE COUNTY, WISCONSIN

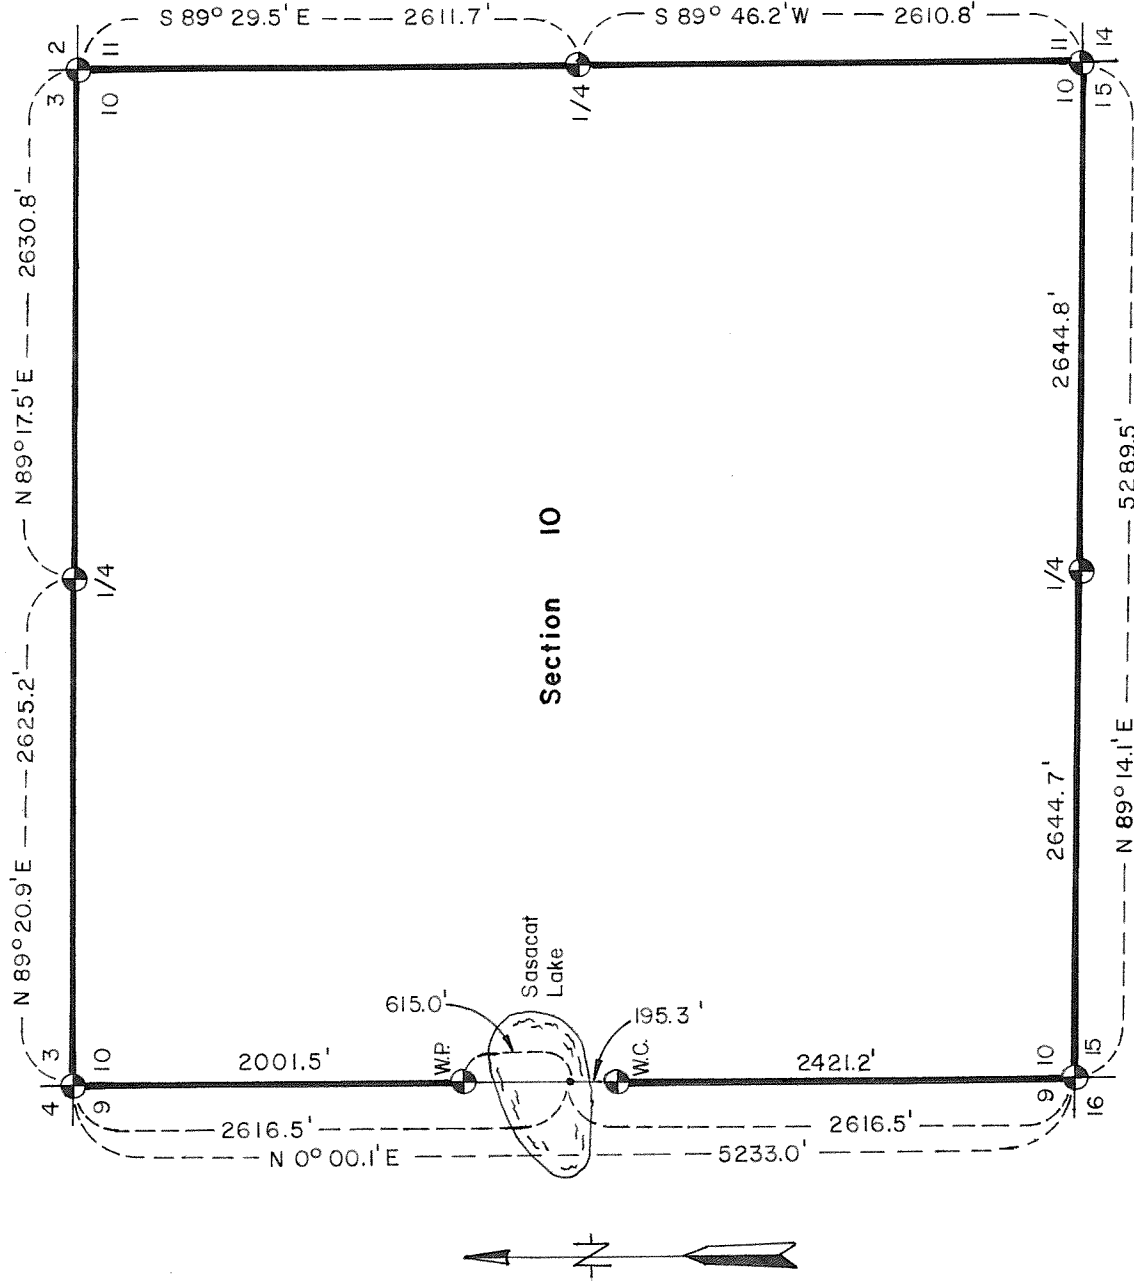

LEGEND

- 2" Diameter Aluminum Monument, 36" Long.
- Marked Boundary Lines of U.S. Government Lands.

RECORD # 10140
LANGLADE COUNTY SURVEYORS OFFICE
DATE FILED: 6/9/93 BY: D. T. LUSTY

Conversion Factors:
Feet to Meters - 0.304801
Meters to Feet - 3.280833


Stock No. 26273

SHEET 1 of 4

CERTIFIED LAND CORNER RESTORATION & ESTABLISHMENT

BEING SECTION 10

Township 33 North, Range 14 East, Fourth Principal Meridian
 LANGLADE COUNTY, WISCONSIN

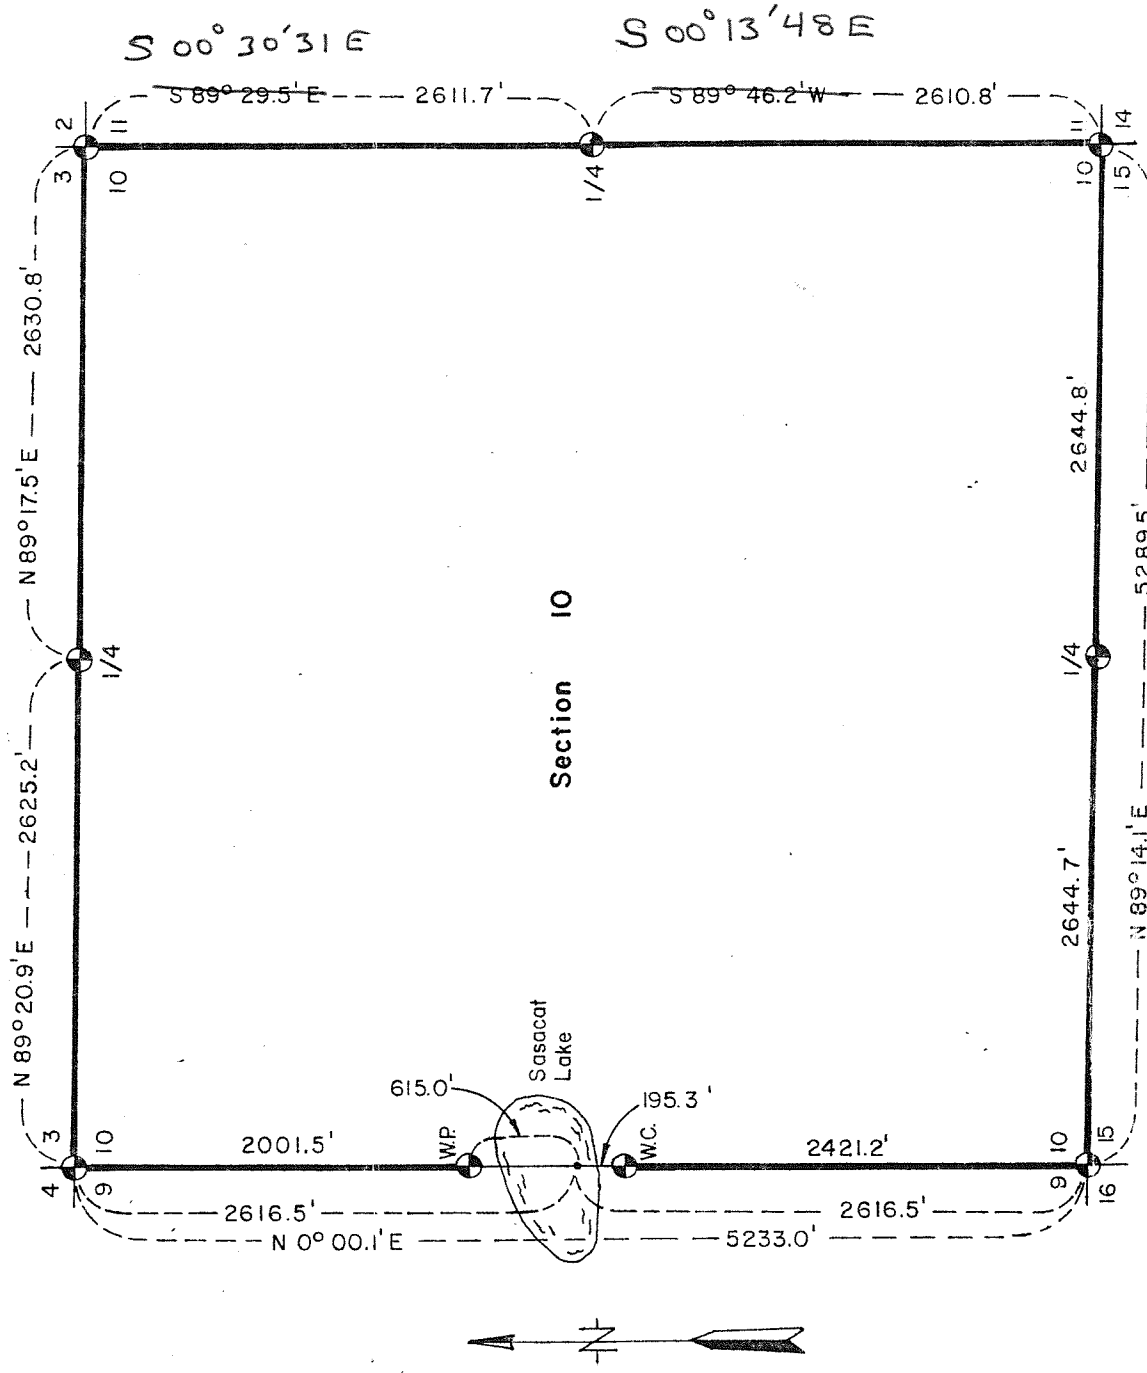**LEGEND**

● 2" Diameter Aluminum Monument, 36" Long.

— Marked Boundary Lines of U.S. Government Lands.

Don Johnson
 BLS 1651

Conversion Factors:

Feet to Meters — 0.304801

Meters to Feet — 3.280833

5/6/03

Stock No. 26273

SURVEY NOTES

This survey was made by the U. S. Department of Agriculture, Forest Service, for the purpose of restoring and establishing corners on the perimeter of Section 10, and to locate and mark the boundaries of U. S. Government lands on the perimeter of Section 10, Township 33 North, Range 14 East, Fourth Principal Meridian, Langlade County, Wisconsin.

The original Government subdivision survey of this township was made in 1865.

The corner positions recovered, restored, and established by this survey are marked by the monument described in the map legend.

The corner positions established were located to an accuracy of one part in 3000.

The bearings between corner positions are true bearings as determined by solar observations.

The field notes of this survey and a copy of this plat are on file in the Forest Supervisor's Office at Rhinelander, Wisconsin.

CORNERS RECOVERED AND RESTORED

E-13 1. Section Corner to Sections 3-4-9-10, T.33N., R.14E.

Corner found marked by a new wood post with an old wood post alongside.
Corner References:

Butternut Hickory	7"	N.12°E.	25.74	feet
Sugar	6"	S.60°E.	31.24	feet
Sugar	14"	S.78°W.	38.23	feet
Sugar	20"	N.40°W.	50.75	feet
Steel Sign Post		South	1.70	feet

E-17 2. Section Corner to Sections 2-3-10-11, T.33N., R.14E.

Corner found marked by a new wood post with an old wood post alongside.
Corner References:

Sugar	5"	N.13°E.	22.70	feet
White Ash	9"	S.75°E.	29.56	feet
White Ash	11"	S.23°W.	44.18	feet
Yellow Birch	9"	N.73°W.	23.02	feet
Steel Sign Post		South	1.30	feet

J-17 3. Section Corner to Sections 10-11-14-15, T.33N., R.14E.

Corner found marked by a wood post. Corner perpetuated by Hutchinson in 1930 from original BT.
Corner References:

Sugar	8"	N.28°E.	25.06	feet
Sugar	8"	S.77°E.	14.60	feet
Sugar	7"	S.55°W.	8.74	feet
Sugar	10"	N.13°W.	17.60	feet
Steel Sign Post		North	2.30	feet

Stock No. 26273

J-13

4. Section Corner to Sections 9-10-15-16, T.33N., R.14E.
Corner found worked by wood post and mound of stone.
Corner References:

White Ash	7"	N.83°E.	46.28	feet
Sugar	6"	S.54°E.	30.47	feet
Yellow Birch	6"	S.52°W.	8.94	feet
Sugar	7"	N.84°W.	23.33	feet
Steel Sign Post		East	5.20	feet

E-15

5. Quarter Corner to Sections 3 and 10, T.33N., R.14E.
Corner found marked by a wood post.
Corner References:

Sugar	5"	S.39°E.	9.03	feet
Sugar	10"	S.58°W.	24.14	feet
White Ash	9"	N.52°W.	39.92	feet
Steel Sign Post		West	1.85	feet

G-17

6. Quarter Corner to Sections 10 and 11, T.33N., R.14E.
Corner found marked by a wood post.
Corner References:

Sugar	8"	N.48°E.	16.28	feet
Sugar	9"	S.39°E.	26.25	feet
Sugar	10"	N.56°W.	29.00	feet
Steel Sign Post		South	1.70	feet

J-15

7. Quarter Corner to Sections 10 and 15, T.33N., R.14E.
Corner restored by lost methods, on line and proportionally between section corners east and west.
Corner References:

White Ash	15"	S.51°E.	36.51	feet
Sugar	14"	S.53°W.	34.36	feet
Sugar	16"	N.26°W.	10.93	feet
Steel Sign Post		West	2.10	feet

G-13

8. Witness Corner to Quarter Corner to Sections 9 and 10, T.33N., R.14E.
Corner restored by establishment of quarter corner in lake and witnessing that position 195.3 feet south on line with a new witness corner.
Corner References:

Sugar	4"	N.25°E.	6.00	feet
Yellow Birch	5"	S.77°E.	43.12	feet
Sugar	7"	S.50°W.	15.99	feet
Steel Sign Post		South	1.90	feet

CORNERS ESTABLISHED

FG-13

1. Witness Point to Sections 9 and 10, T.33N., R.14E.
Corner witness line between Sections 9 and 10 on the north side of lake 810.3 feet north of witness corner to west quarter corner.
Corner References:

Sugar	12"	S.69°E.	19.25	feet
Sugar	16"	S.81°W.	25.34	feet
Basswood	16"	N.37°W.	24.18	feet
Steel Sign Post		South	1.90	feet

Stock No. 26273

SURVEYOR'S AFFIDAVIT

State of Wisconsin] SS
County of Langlade]

I, Milo E. Stefan, Cadastral Surveyor, USDA, Forest Service, and a registered surveyor in the State of Wisconsin, hereby certify that I have surveyed Section 10, Township 33 North, Range 14 East, Fourth Principal Meridian, State of Wisconsin.

The plat map and the notes herewith are a correct representation of the land surveyed and divided. I have surveyed and subdivided said section in accordance with the rules for survey of the public lands and with the statutes of the State of Wisconsin.



Milo E. Stefan
Cadastral Surveyor, USDA, Forest Service
R.L.S., State of Wisconsin
Certificate S-1558

Date of Survey: 1983