
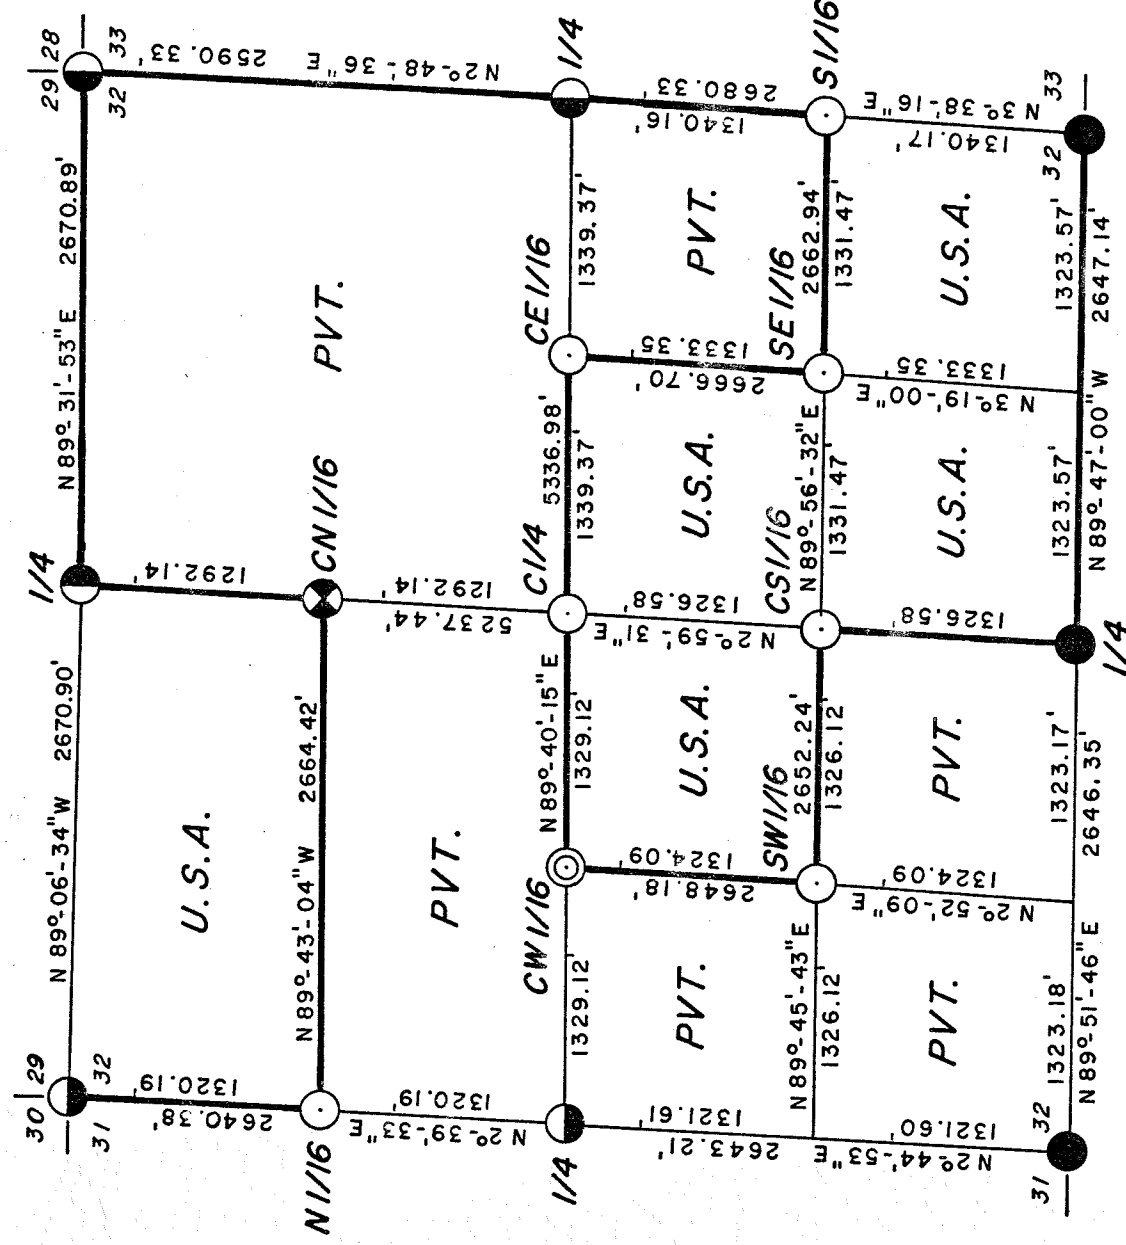



PLAT OF SURVEY U.S. GOVERNMENT LAND

BEING THE NW 1/4 OF THE NW 1/4, THE W 1/2 AND THE SE 1/4 OF THE SE 1/4, & THE NE 1/4 OF THE SW 1/4 OF SECTION 32, TOWNSHIP 31 NORTH, RANGE 15 EAST, FOURTH PRINCIPAL MERIDIAN, LANGLADE COUNTY, WISCONSIN.



LEGEND

- G.L.O. CONCRETE MONUMENT BRASS CAP
- ◐ LANGLADE COUNTY MONUMENT
- ◑ OCONTO COUNTY MONUMENT
- ◒ 2-1/2" X 36" U.S.F.S. ALUMINUM MONUMENT
- ⊗ RAILROAD SPIKE IN CAMPGROUND DRIVE
- ⊙ 2-1/2" X 60" ALUMINUM MONUMENT SET THIS SURVEY
- 2-1/2" X 36" ALUMINUM MONUMENT SET THIS SURVEY
- BOUNDARY U.S. GOVERNMENT LAND, MARKED & POSTED TO U.S.F.S. STANDARDS.

Conversion Factors:
Feet to Meters 0.304801
Meters to Feet 3.280833

RECORD # 10346
LANGLADE COUNTY SURVEYORS OFFICE
DATE FILED: 12/7/93 BY: DT

SURVEY NOTES

This survey was made by Soder Surveying, pursuant to United States Department of Agriculture, Forest Service Contract #53-56A6-6-00011, True Line Survey for the purpose of marking and perpetuating the exterior and interior boundary lines of U.S. Government lands on the perimeter and within Section 32, T31N, R15E, Langelade County, Wisconsin as shown on the plat herewith.

The U.S. Government lands in this section were aquired in 1934.

The original Government subdivision survey of this township was made in 1857.

The corner positions recovered, restored, and established by this survey are marked by the monument described in the map legend.

The corner positions established were located to an accuracy of 1 part in 3000.

The bearings between corner positions are true bearings as determined by solar observations.

The field notes of this survey and a copy of this plat are on file in the Forest Supervisor's Office in Rhinelander, WI.

Corners Recovered

1. Section Corner to Sections 30, 29, 31 & 32, T31N, R15E
Document in Langelade County Survey Records.
2. Section Corner to Sections 29, 28, 32 & 33, T31N, R15E
Document #351117 in Oconto County Register of deeds.
3. Section Corner to Sections 31 & 32, T31N, R15E
Document in Langlade County Survey Records.
4. Section Corner to Sections 32 & 33, T31N, R15E
G.L.O. Concrete Monument brass cap set in 1933.
5. Quarter Corner to Sections 29 & 32, T31N, R15E
Document in Langlade County Survey Records.
6. Quarter Corner to Sections 32 & 33, T31N, R15E
Document #349173 in Oconto County Register of Deeds.
7. Quarter Corner to Sections 32(S $\frac{1}{4}$), T31N, R15E
Document in Langlade County Survey Records.
8. Quarter Corner to Sections 31 & 32, T31N, R15E
Document in Langlade County Survey Records.

Corners Established

1. Center One-Quarter to Section 32, T31N, R15E
Corner established at the intersection of the North-South quarter line and the East-West quarter line to Section 32 and witnessed as follows:

Spruce 9"	N 80° E	13.32 feet
Spruce 8"	S 49° E	14.23 feet
Spruce 9"	S 36° W	8.77 feet
Steel Sign Post	East	0.87 feet
2. North One-Sixteenth to Section 32, T31N, R15E
Corner established proportionately and on line between the West one-quarter and the Northwest corner of Section 32.

Maple 7"	N 13° E	55.99 feet
Dbl. Maple 8"	N 52° E	85.96 feet
Steel Sign Post	North	26.30 feet
3. Center North One-Sixteenth Corner to Section 32, T31N, R15E
Corner established proportionately and on line between the Center one-quarter corner and the North one-quarter corner of Section 32.

Reference Corner	N 43° W	60.87 feet
Steel Sign Post	Northwest	0.80 feet
Reference Corner	S 43° E	93.01 feet
Steel Sign Post	Southeast	0.80 feet
4. Center East One-Sixteenth Corner to Section 32, T31N, R15E
Corner established proportionately and on line between the Center one-quarter corner and the East one-quarter corner of Section 32.

W. Pine 9"	S 27° E	7.50 feet
Maple 9"	S 24° W	29.75 feet
Steel Sign Post	West	0.74 feet
5. Center West One-Sixteenth Corner to Section 32, T31N, R15E
Corner established proportionately and on line between the Center one-quarter and the West one-quarter of Section 32.

Cedar 4"	S 27° W	12.83 feet
Cedar 9"	N 70° W	14.66 feet
Steel Sign Post	South	1.50 feet
6. Southeast One-Sixteenth Corner to Section 32, T31N, R15E
Corner established at the intersection of the South and East one-sixteenth lines of Section 32.

Triple Oak 10"	N 37° W	8.28 feet
Dbl. Maple 8"	S 73° E	19.95 feet
Steel Sign Post	East	1.03 feet

Corners Established Con't.

7. Center South One-Sixteenth Corner to Section 32, T31N, R15E
Corner established proportionately and on line between the
Center one-quarter corner and the South one quarter corner
of Section 32.

W. Pine	10"	S 34° E	87.93 feet
Aspen	9"	S 58° W	30.97 feet
Steel Sign Post		South	1.55 feet

8. South One-Sixteenth Corner to Section 32, T31N, R15E
Corner established proportionately and on line between the
East one-quarter corner and the Southeast corner of Section
32.

R. Pine	12"	N 45° E	23.39 feet
Maple	10"	S 10° E	20.93 feet
Steel Sign Post		North	0.95 feet

9. Southwest One-Sixteenth Corner to Section 32, T31N, R15E
Corner established at the intersection of the South and
West one-sixteenth lines of Section 32.


Tamarack	6"	N 58° E	16.36 feet
Cedar	6"	S 26° W	3.10 feet
Steel Sign Post		East	0.88 feet

SURVEYOR'S AFFADAVIT

State of Wisconsin) ss
County of Langlade)

I, Kip W. Soder, registered land surveyor in the State of Wisconsin, hereby certify that I have run the boundary lines shown hereon and set the established corners in Section 32, Township 31 North, Range 15 East, Fourth Principal Meridian, Langlade County, State of Wisconsin.

The plat map and the notes herewith are a correct representation of the land which was subdivided by the U.S. Forest Service Surveyor based on traverse work by a seperate previous contract. The controlling corners were set and certified to by the U.S. Forest Service Surveyor. I have surveyed said boundary and set said established corners in accordance with the rules for survey of the public lands and with the Statutes of the State of Wisconsin.

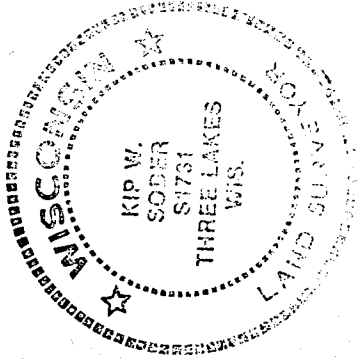

Kip W. Soder
Kip W. Soder
R.L.S. State of Wisconsin
Certificate S-1731

Date of Survey: 1986

Plat ready for filing *Samuel S. Becker*
District Ranger