


PLAT OF SURVEY
U.S. GOVERNMENT LAND

BEING THE NW 1/4, THE SW 1/4, OF THE NE 1/4, THE SE 1/4 OF THE NE 1/4, THE NE 1/4 OF THE NE 1/4, AND THE SW 1/4 OF THE SE 1/4, SECTION 8, T 31N, R 15E, FOURTH PRINCIPAL MERIDIAN, LANGLEY COUNTY, WISCONSIN.

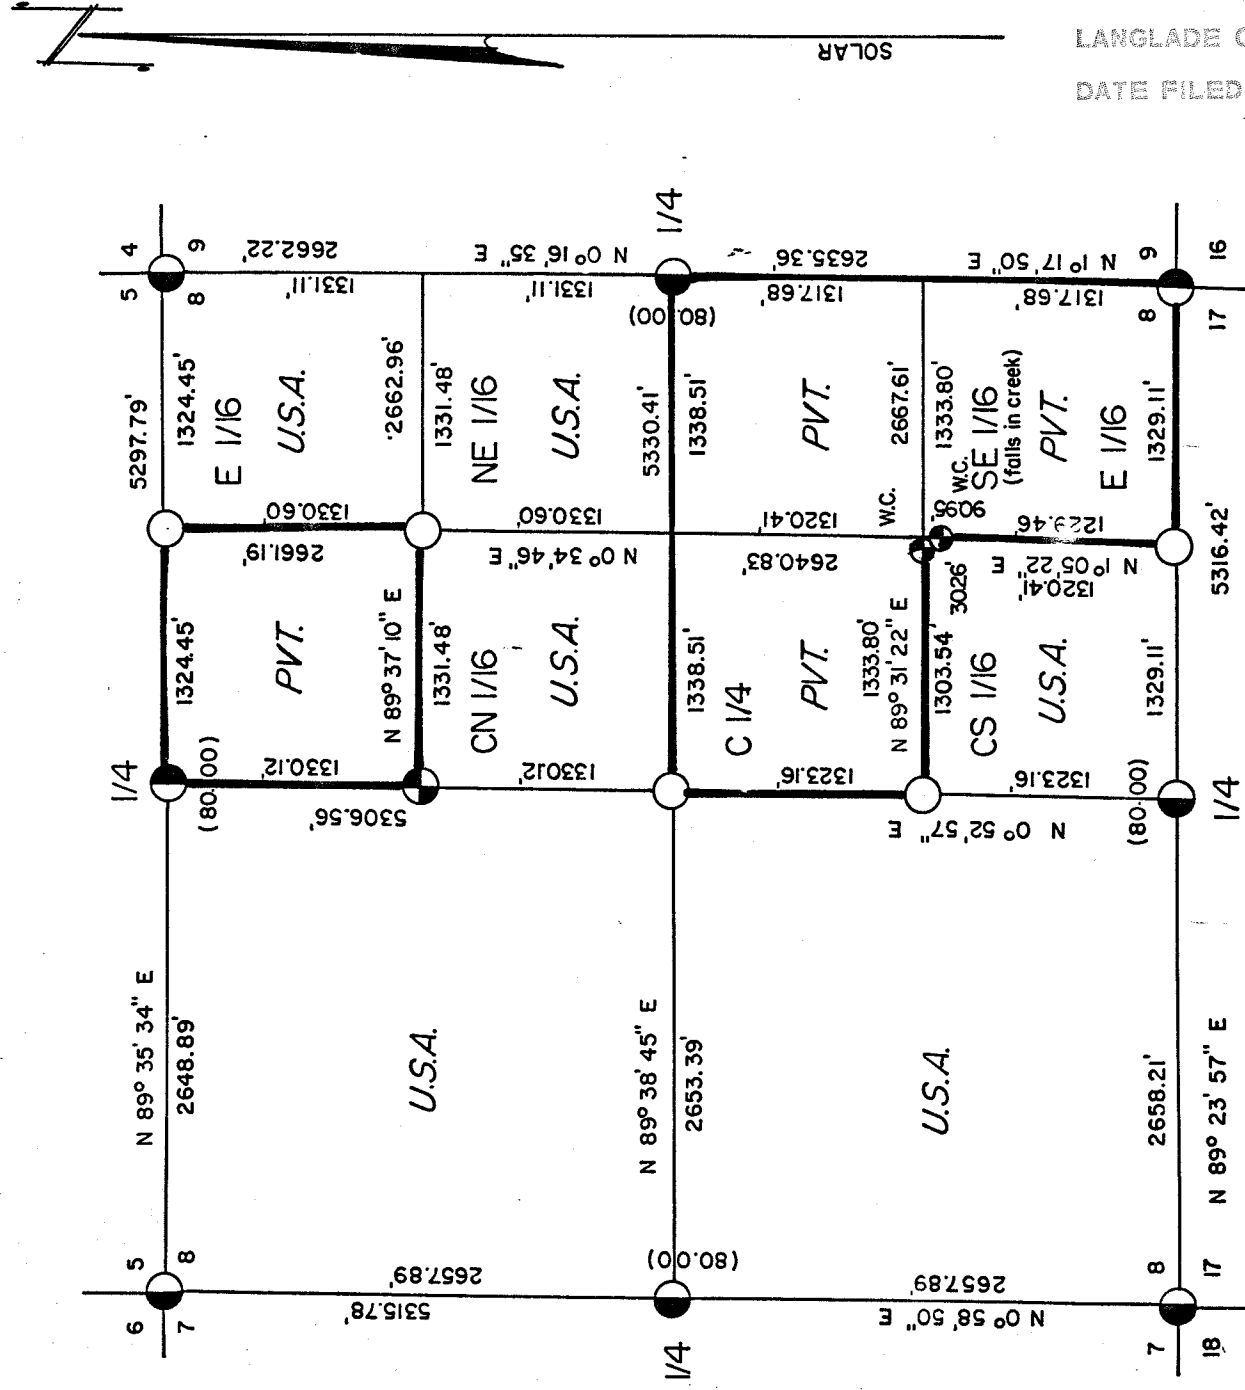

Conversion Factors:
 at to Meters- 0.304801
 bers to Feet- 3.280833

LEGEND

- | LEGEND | |
|--|---|
|  | 2"x60" aluminum pipe with 3" aluminum tablet. |
|  | 2"x30" aluminum pipe with 3" aluminum tablet. |
|  | 2"x60" aluminum pipe with 3" aluminum tablet. |
|  | 2"x30" aluminum pipe with 3" aluminum tablet set this survey. |

Boundary U.S. Government Land, marked and posted
to U.S.F.S. standards.

() Original distances in chains.

W.C. Witness corner.

RECORD # 44

LANGLADE COUNTY SURVEYORS OFFICE

DATE FILED: 12/7/93 BY: DT

Stock No. 26273SURVEY NOTES

This survey was made by Robinson & Associates, Inc. pursuant to United States Department of Agriculture, Forest Service Contract #53-56A6-5-00095, True Line Survey for the purpose of marking and perpetuating the exterior and interior boundary lines of the U.S. Government land on the perimeter and within Section 8, T31N, R15E, Langlade County, Wisconsin as shown on the plat herewith.

The U.S. Government lands in this section were acquired in 1934, 1937 and 1947.

The original Government subdivision survey of this township was made in 1857.

The corner positions recovered, restored, and established by this survey are marked by the monument described in the map legend.

The corner positions established were located to an accuracy of one part in 3000.

The bearings between corner positions are true bearings as determined by solar observations.

The field notes of this survey and a copy of this plat are on file in the Forest Supervisor's Office in Rhinelander, Wisconsin.

CORNERS RECOVERED

1. Section Corner to Sections 5, 6, 7 & 8, T31N, R15E
Document in Langlade County Survey Records.
2. Section Corner to Sections 7, 8, 17 & 18, T31N, R15E
Document in Langlade County Survey Records.
3. Section Corner to Sections 8, 9, 16 & 17, T31N, R15E
Document #351116 in Oconto County Register of Deeds.
4. Quarter Corner to Sections 7 & 8, T31N, R15E
Document in Langlade County Survey Records.
5. Quarter Corner to Sections 8 & 17, T31N, R15E
Document in Langlade County Survey Records.
6. Quarter Corner to Sections 8 & 9, T31N, R15E
Document #349137 in Oconto County Register of Deeds.
7. Quarter Corner to Sections 8 & 5, T31N, R15E
Document in Langlade County Survey Records.

Stock No. 26273

CORNERS ESTABLISHED

1. Center Quarter Corner to Section 8, T31N, R15E
 Corner established at the intersection of the North-South and East-West one-quarter lines of Section 8.
 Corner References:

White Birch	10"	N73°E	39.50 feet
White Birch	8"	S60°E	57.87 feet
Steel Sign Post		East	2.00 feet
2. East One-Sixteenth Corner to Section 8, T31N, R15E
 Corner established on line and at the midpoint between the North one-quarter and the Northeast Section corners of Section 8.
 Corner References:

Cedar	11"	S13°W	4.98 feet
Cedar	5"	N83°E	11.97 feet
Steel Sign Post		West	1.00 feet
3. Center-North One-Sixteenth Corner to Section 8, T31N, R15E
 Corner established on line and at the midpoint between the Center one-quarter and the North one-quarter corners of Section 8.
 Corner References:

White Birch	8"	S10°E	5.35 feet
Cedar	5"	S70°W	9.97 feet
Steel Sign Post		East	1.00 feet
4. North-East One-Sixteenth Corner to Section 8, T31N, R15E
 Corner established at the intersection of the North and East one-sixteenth lines of Section 8.
 Corner References:

Maple	7"	N50°W	34.75 feet
White Birch(twin)	5"	S10°W	14.60 feet
Steel Sign Post		North	2.30 feet
5. Center-South One-Sixteenth Corner to Section 8, T31N, R15E
 Corner established on line and at the midpoint between the Center one-quarter and the South one-quarter corners of Section 8.
 Corner References:

Spruce	8"	N75°E	16.57 feet
Cedar	8"	N9°W	27.25 feet
Steel Sign Post		East	2.00 feet

Stock No. 26273

6. East One-Sixteenth Corner to Section 8, T31N, R15E
 Corner established on line and at the midpoint between the South one-quarter and the Southeast section corners of Section 8.

Corner References:

Red Oak	7"	S69°W	29.21 feet
Red Maple	7"	N20°E	43.47 feet
Steel Sign Post		East	2.00 feet

7. Witness Corner to the South-East One-Sixteenth Corner to Section 8, T31N, R15E
 Corner bears S89°31'22"W, 30.26 feet from the true location of the Southeast corner of Section 8.

Corner References:

White Ash	7"	S57°W	41.02 feet
Cedar	14"	N22°W	69.25 feet
Steel Sign Post		West	2.00 feet

8. Witness Corner to the South-East One-Sixteenth Corner to Section 8, T31N, R15E
 Corner bears S1°05'22"W, 90.95 feet from the true location of the Southeast one-sixteenth corner of Section 8.

Corner References:


Balsam	10"	S75°W	2.83 feet
Balsam	10"	N76°E	25.15 feet
Steel Sign Post		North	2.00 feet

Stock No. 26273

SURVEYOR'S AFFIDAVITState of Wisconsin }
County of Langlade } ss

I, Robert H. Winat, registered land surveyor in the State of Wisconsin, hereby certify that I have run the boundary lines shown hereon and set the established corners in Section 8, Township 31 North, Range 15 East, Fourth Principal Meridian, Langlade County, State of Wisconsin.

The plat map and the notes herewith are a correct representation of the land which was subdivided by the U.S. Forest Service Surveyor based on traverse work by a separate previous contract. The controlling corners were set and certified to by the U.S. Forest Service Surveyor. I have surveyed said boundary and set said established corners in accordance with the rules for survey of the public lands and with the statutes of the State of Wisconsin.

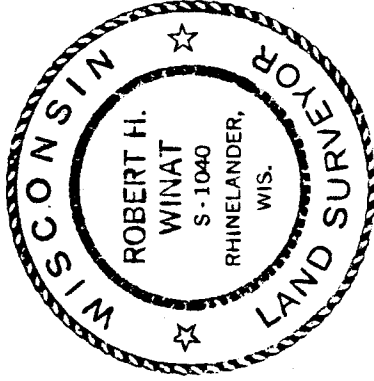

Robert H. Winat
R.L.S. State of Wisconsin
Certificate S-1040

Date of Survey: 1985

Plat Ready for Filing


District Ranger