


Stock No. 26273

PLAT OF SURVEY U.S. GOVERNMENT LAND

BEING THE NW 1/4, THE NE 1/4, AND THE N 1/2 OF THE SE 1/4, SECTION 19, T31N, R15E, FOURTH PRINCIPAL MERIDIAN, LANGLADE COUNTY, WISCONSIN.

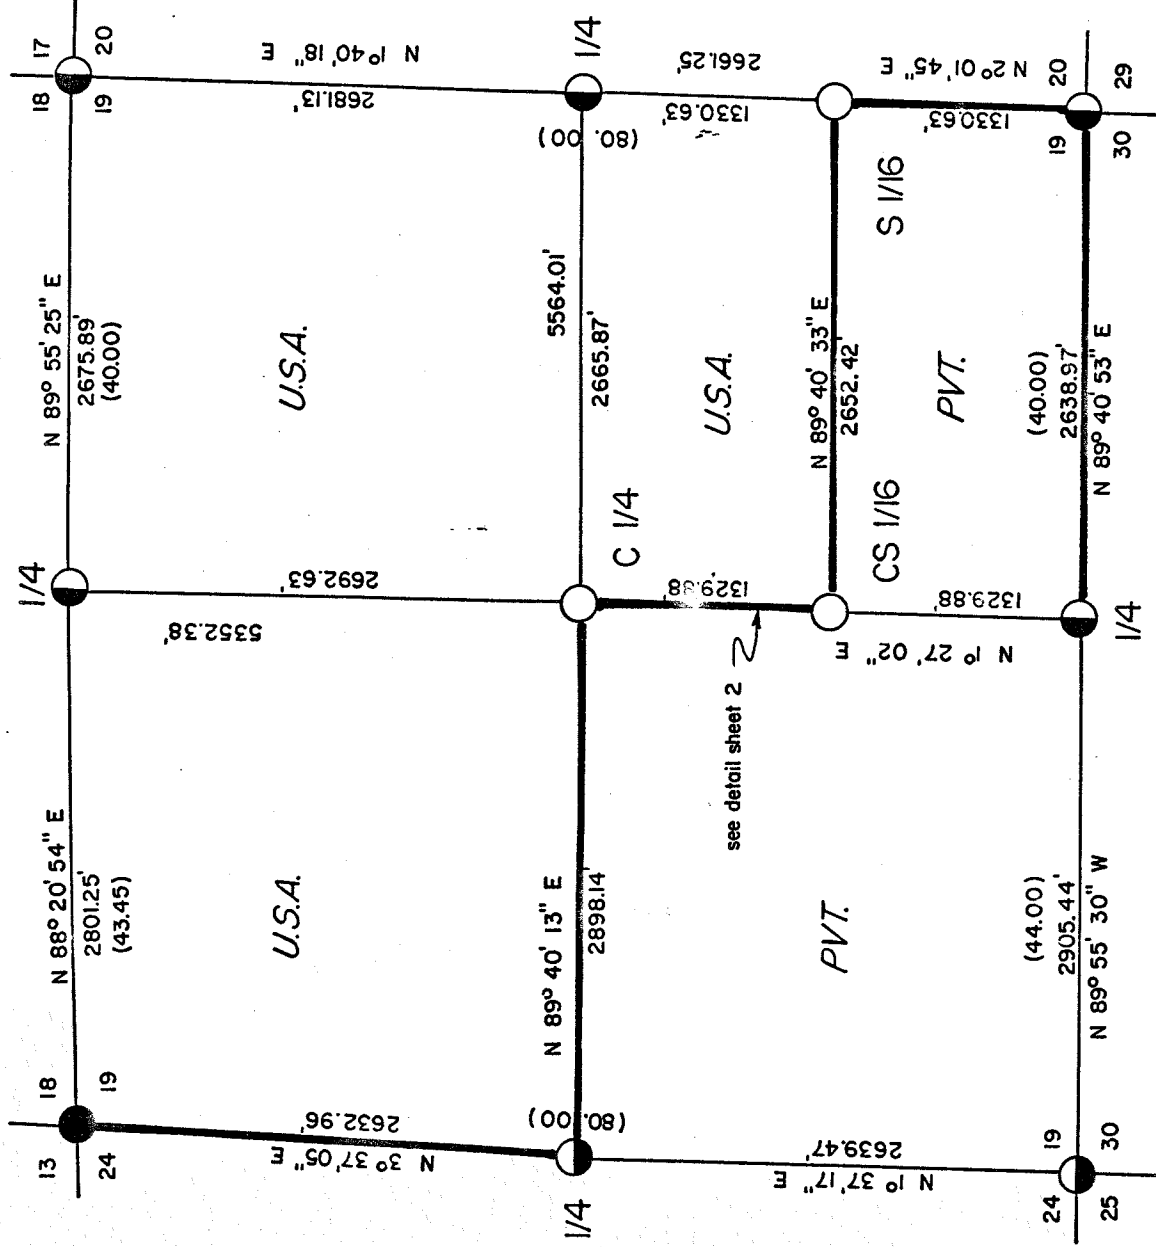

Conversion Factors:
Feet to Meters- 0.304801
Meters to Feet- 3.280833

LEGEND



- 2"X30" aluminum pipe with 3" aluminum tablet.
- 2"X60" galvanized pipe with 2" brass cap.
- 2" black iron pipe with 2" brass cap.
- 1 1/2" black iron pipe with 2" brass cap.
- 2"X30" aluminum pipe with 3" aluminum tablet set this survey.

— Boundary U.S. Government Land, marked and posted to U.S.F.S. standards.

() Original distances in chains.

RECORD # 10348
LANGLADE COUNTY SURVEYORS OFFICE
DATE FILED: 12/7/93 BY: DT.

Stock No. 26273

ENCROACHMENT ON LANDS IN SECTION 19, T31N, R15E.

U.S.A. LANDS

N89°40'13"E

Center $\frac{1}{4}$

fence corner bears S16°E, 27'
from C $\frac{1}{4}$.

fence 8' East of True Line

U.S.A. LANDS

Scale 1"=200'

fence 6' East of True Line

PRIVATE LANDS

Driveway

Pine Tree Plantation

24" Red Maple
(on line)

CS 1/16 Corner

PRIVATE LANDS

Stock No. 26273SURVEY NOTES

This survey was made by Robinson & Associates, Inc. pursuant to United States Department of Agriculture, Forest Service Contract #53-56A6-5-00095, True Line Survey for the purpose of marking and perpetuating the exterior and interior boundary lines of the U.S. Government land on the perimeter and within Section 19, T31N, R15E, Langlade County, Wisconsin as shown on the plat herewith.

The U.S. Government lands in this section were acquired in 1934, 1936 and 1952.

The original Government subdivision survey of this township was made in 1857.

The corner positions recovered, restored, and established by this survey are marked by the monument described in the map legend.

The corner positions established were located to an accuracy of one part in 3000.

The bearings between corner positions are true bearings as determined by solar observations.

The field notes of this survey and a copy of this plat are on file in the Forest Supervisor's Office in Rhinelander, Wisconsin.

CORNERS RECOVERED

1. Section Corner to Sections 13, 18, 19 and 20, T31N, R15E
Document in Langlade County Survey Records.
2. Section Corner to Sections 18, 17, 19 and 20, T31N, R15E
Document in Langlade County Survey Records.
3. Section Corner to Sections 19, 20, 30 and 29, T31N, R15E
Document in Langlade County Survey Records.
4. Section Corner to Sections 19, 24, 25 and 30, T31N, R15E
Document in Langlade County Survey Records.
5. Quarter Corner to Sections 18 and 19, T31N, R15E
Document in Langlade County Survey Records.
6. Quarter Corner to Sections 19 and 20, T31N, R15E
Document in Langlade County Survey Records.
7. Quarter Corner to Sections 19 and 30, T31N, R15E
Document in Langlade County Survey Records.
8. Quarter Corner to Sections 19 and 24, T31N, R15E
Document in Langlade County Survey Records.

Stock No. 26273CORNERS ESTABLISHED

1. Center Quarter Corner to Section 19, T31N, R15E
 Corner established at the intersection of the North-South
 and East-West one-quarter lines of Section 19.
 Corner References:

Sugar Maple	8"	S12°W	20.74 feet
White Pine	5"	N30°E	17.88 feet
Red Oak	9"	N17°W	31.02 feet
Steel Sign Post		South	1.00 feet

2. Center South One-Sixteenth Corner to Section 19, T31N, R15E
 Corner established at the midpoint and on line between the Center one-
 quarter and the South one-quarter of Section 19.
 Corner References:

Red Pine	11"	N65°E	33.39 feet
Red Pine	10"	N35°E	56.42 feet
Power Pole		N1°E	51.72 feet
Steel Sign Post		East	3.00 feet

3. South One-Sixteenth Corner to Sections 19 and 20, T31N, R15E
 Corner established at the midpoint and on line between the East one-
 quarter and Southeast Section corner of Section 19.
 Corner References:


Red Pine	8"	N31°W	20.28 feet
Red Pine(twin)	9"	S28°E	45.35 feet
Steel Sign Post		South	1.00 feet

Stock No. 26273

State of Wisconsin)
County of Langlade) ssSURVEYOR'S AFFIDAVIT

I, Robert H. Winat, registered land surveyor in the State of Wisconsin, hereby certify that I have run the boundary lines shown hereon and set the established corners in Section 19, Township 31 North, Range 15 East, Fourth Principal Meridian, Langlade County, State of Wisconsin.

The plat map and the notes herewith are a correct representation of the land which was subdivided by the U.S. Forest Service Surveyor based on traverse work by a separate previous contract. The controlling corners were set and certified to by the U.S. Forest Service Surveyor. I have surveyed said boundary and set said established corners in accordance with the rules for survey of the public lands and with the statutes of the State of Wisconsin.

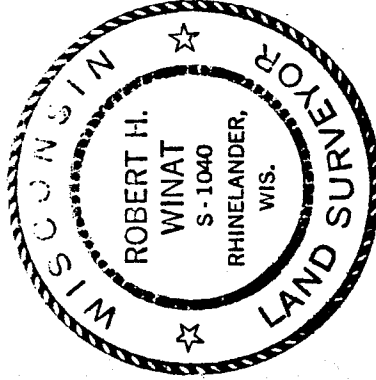

Robert H. Winat
R.L.S. State of Wisconsin
Certificate S-1040

Date of Survey: 1985

Plat Ready for Filing

District Ranger