
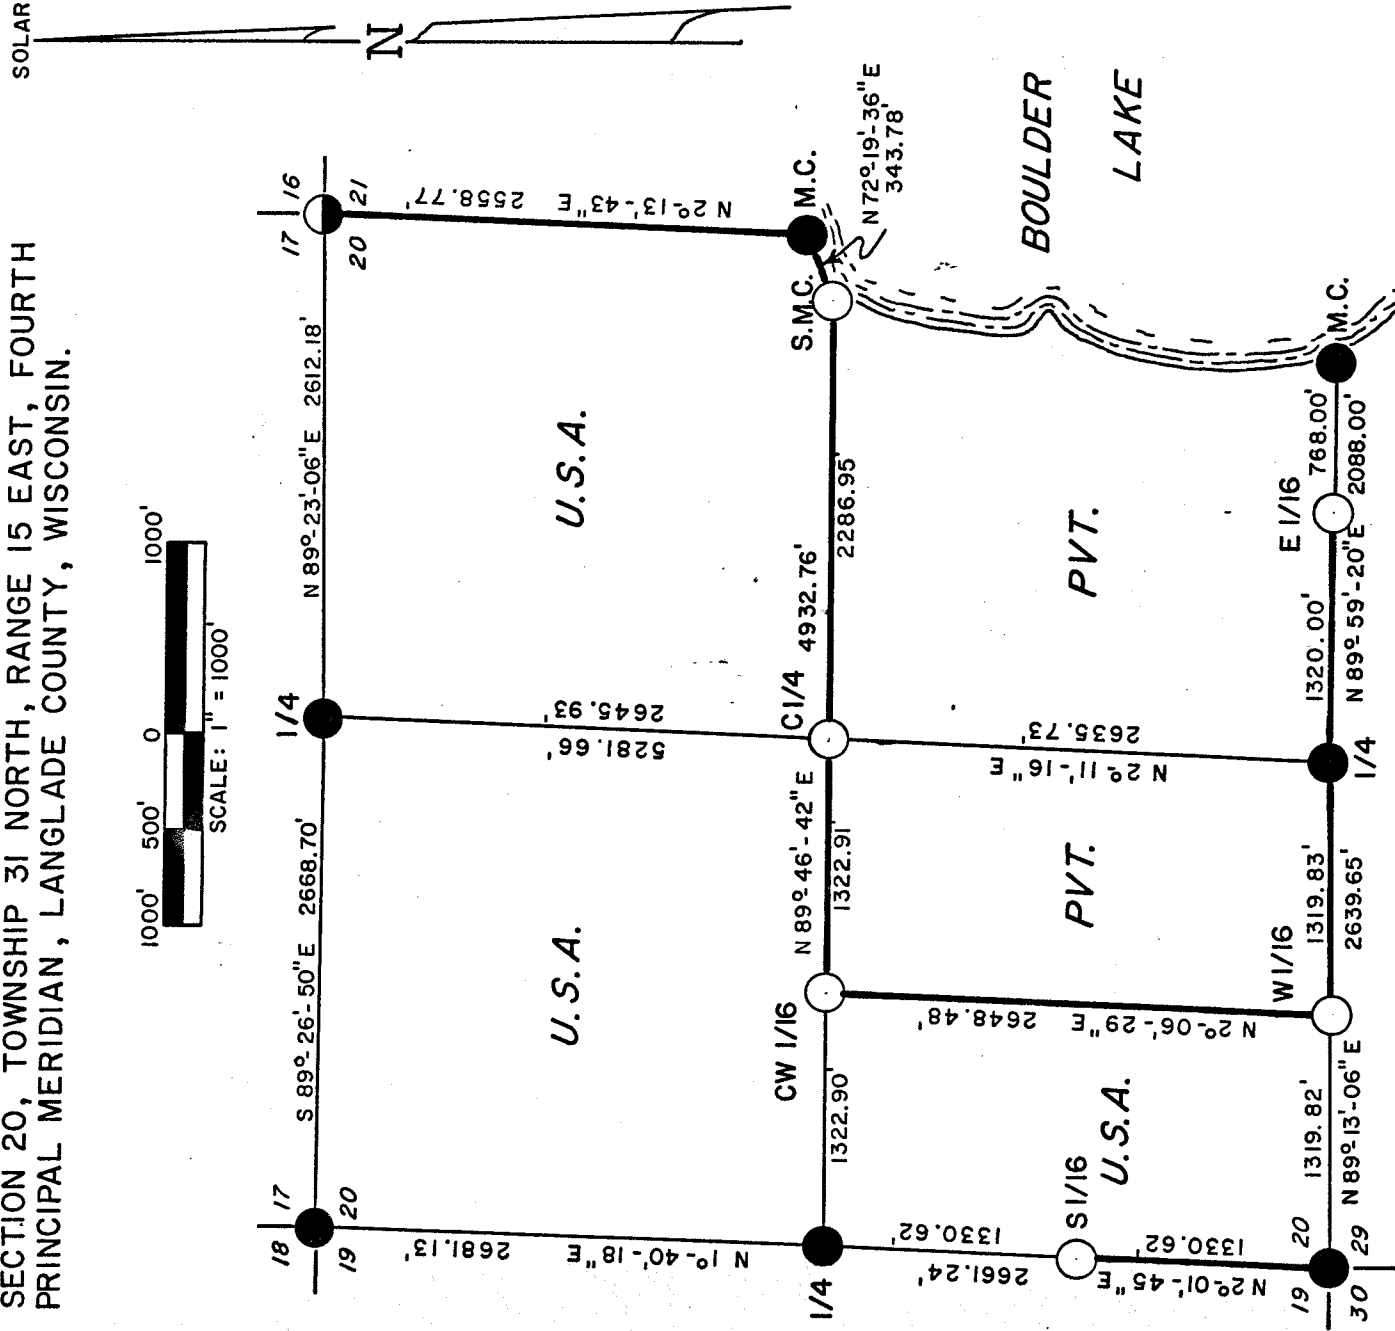


Stock No. 26273

Sheet 1 of 4

PLAT OF SURVEY U.S. GOVERNMENT LAND

BEING THE NE 1/4, THE NW 1/4 & THE W 1/2 OF THE SW 1/4 OF SECTION 20, TOWNSHIP 31 NORTH, RANGE 15 EAST, FOURTH PRINCIPAL MERIDIAN, LANGLADE COUNTY, WISCONSIN.



RECORD # 10349
LANGLADE COUNTY SURVEYORS OFFICE
DATE FILED: 12/7/93 BY: DT

— LEGEND —

Conversion Factors:

Feet to Meters .304801
Meters to Feet 3.280833

U.S.F.S. IRON PIPE BRASS CAP

 U.S.F.S. ALUMINUM PIPE WITH 3" ALUMINUM TABLET
 ALUMINUM PIPE WITH 3" ALUMINUM TABLET SET THIS SURVEY.

BOUNDARY U.S. GOVERNMENT LAND, MARKED & POSTED TO U.S.F.S. STANDARDS.

Stock No. 26273

Sheet 2 of 4

SURVEY NOTES

This survey was made by Soder Surveying, pursuant to United States Department of Agriculture, Forest Service Contract #53-56A6-5-00095, True Line Survey for the purpose of marking and perpetuating the exterior and interior boundary lines of the U.S. Government land on the perimeter and within Section 20, T31N, R15E, Langlade County, Wisconsin as shown on the plat herewith.

The U.S. Government lands in this section were acquired in 1934.

The original Government subdivision survey of this township was made in 1857.

The corner positions recovered, restored, and established by this survey are marked by the monument described in map legend.

The corner positions established were located to an accuracy of 1 part in 3000.

The bearings between corner positions are true bearings as determined by solar observations.

The field notes of this survey and a copy of this plat are on file in the Forest Supervisor's Office in Rhinelander, WI.

Corners Recovered

1. Section Corner to Sections 18, 17, 19 & 20, T31N, R15E
Document in Langlade County Survey Records.
2. Section Corner to Sections 17, 16, 20 & 21, T31N, R15E
Document #288684 in Oconto County Register of Deeds.
3. Section Corner to Sections 19, 20, 30 & 29, T31N, R15E
Document in Langlade County Survey Records.
4. Quarter Corner to Sections 20 & 17, T31N, R15E
Document in Langlade County Survey Records.
5. Quarter Corner to Sections 20 & 19, T31N, R15E
Document in Langlade County Survey Records.
6. Quarter Corner to Sections 20 & 29, T31N, R15E
Document in Langlade County Survey Records.

Stock No. 26273

Sheet 3 of 4

Corners Recovered Cont.

7. Meander Corner to Sections 20 & 21, T31N, R15E
Document #349154 in Oconto County Register of Deeds.
8. Meander Corner to Sections 20 & 29, T31N, R15E
Document in Langlade County Survey Records.

Corners Established

1. Center One-Quarter to Section 20, T31N, R15E
Corner established at the intersection of the North-South
quarter line and the East-West quarter line to Section 20
and witnessed as follows:
- | | | | |
|------------------|------|-----------|------------|
| Sugar Maple | 10" | N 89° E | 40.48 feet |
| Sugar Maple | 11" | N 62° E | 12.17 feet |
| Dbl. Sugar Maple | 8" | N 37° W | 64.89 feet |
| Steel Sign Post | West | 1.27 feet | |
2. Center West One-Sixteenth Corner to Section 20, T31N, R15E
Corner established proportionately and on line between the
Center one-quarter and the West one-quarter corner of
Section 20.
- | | | | |
|-----------------|------|-----------|------------|
| Spruce | 8" | N 17° W | 13.60 feet |
| Sugar Maple | 9" | S 52° W | 16.63 feet |
| Steel Sign Post | East | 1.22 feet | |
3. West One-Sixteenth Corner to Section 20, T31N, R15E
Corner established proportionately and on line between the
South one-quarter corner and the Southwest corner of
Section 20.
- | | | | | |
|------------------|----------|-----------|------------|------------|
| Power Pole WPL-D | 31-15-20 | 13/0 | N 67° E | 24.87 feet |
| Sugar Maple | 10" | S 23° E | 33.75 feet | |
| Steel Sign Post | North | 1.45 feet | | |
4. East One-Sixteenth Corner to Section 20, T31N, R15E
Corner established proportionately and on line between the
South one-quarter corner and the Southeast corner of
Section 20.
- | | | | | |
|------------------|----------|-----------|------------|-------------|
| Power Pole WPL-D | 31-15-20 | 39/0 | N 29° W | 23.430 feet |
| Sugar Maple | 5" | S 2° E | 22.94 feet | |
| Steel Sign Post | West | 1.03 feet | | |

Stock No. 26273

Sheet 4 of 4

Corners Established Cont.

5. Special Meander Corner to Section 20, T31N, R15E
 Corner established on the East-West one-quarter line where
 such line intersects the high water mark of lake.


Cedar	13"	N 70° E	17.98 feet
Db1. Sugar Maple	13"	N 13° W	56.41 feet
Steel Sign Post		East	0.90 feet

SURVEYOR'S AFFADAVIT

State of Wisconsin) ss
 County of L'naglade)

I, Kip W. Soder, registered land surveyor in the State of Wisconsin, hereby certify that I have run the boundary lines shown hereon and set the established corners in Section 20, Township 31 North, Range 15 East, Fourth Principal Meridian, Langlade County, State of Wisconsin.

The plat map and the notes herewith are a correct representation of the land which was subdivided by the U.S. Forest Service Surveyor based on traverse work by a seperate previous contract. The controlling corners were set and certified to by the U.S. Forest Service Surveyor. I have surveyed said boundary and set said established corners in accordance with the rules for survey of the public lands and with the Statutes of the State of Wisconsin.

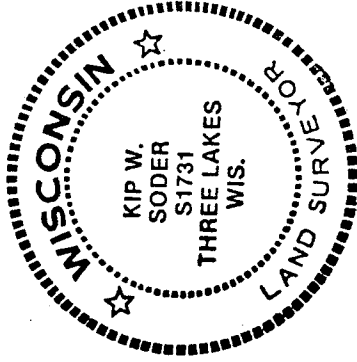

Kip W. Soder
 Kip W. Soder
 R.L.S State of Wisconsin
 Certificate S-1731

Date of Survey: 1986

Plat ready for filing [Signature]
 District Ranger

5/19/03

*Dave
I fear as I can
tell it looks
like this may
be the correct lot.
The corner is
at the corner of the
lot.*




*County
Surveyor
Sanford*

Sheet 1 of 4

BY
LAND

OF THE SW 1/4 OF
15 EAST, FOURTH
WISCONSIN.

BEING THE
SECTION 2
PRINCIPAL

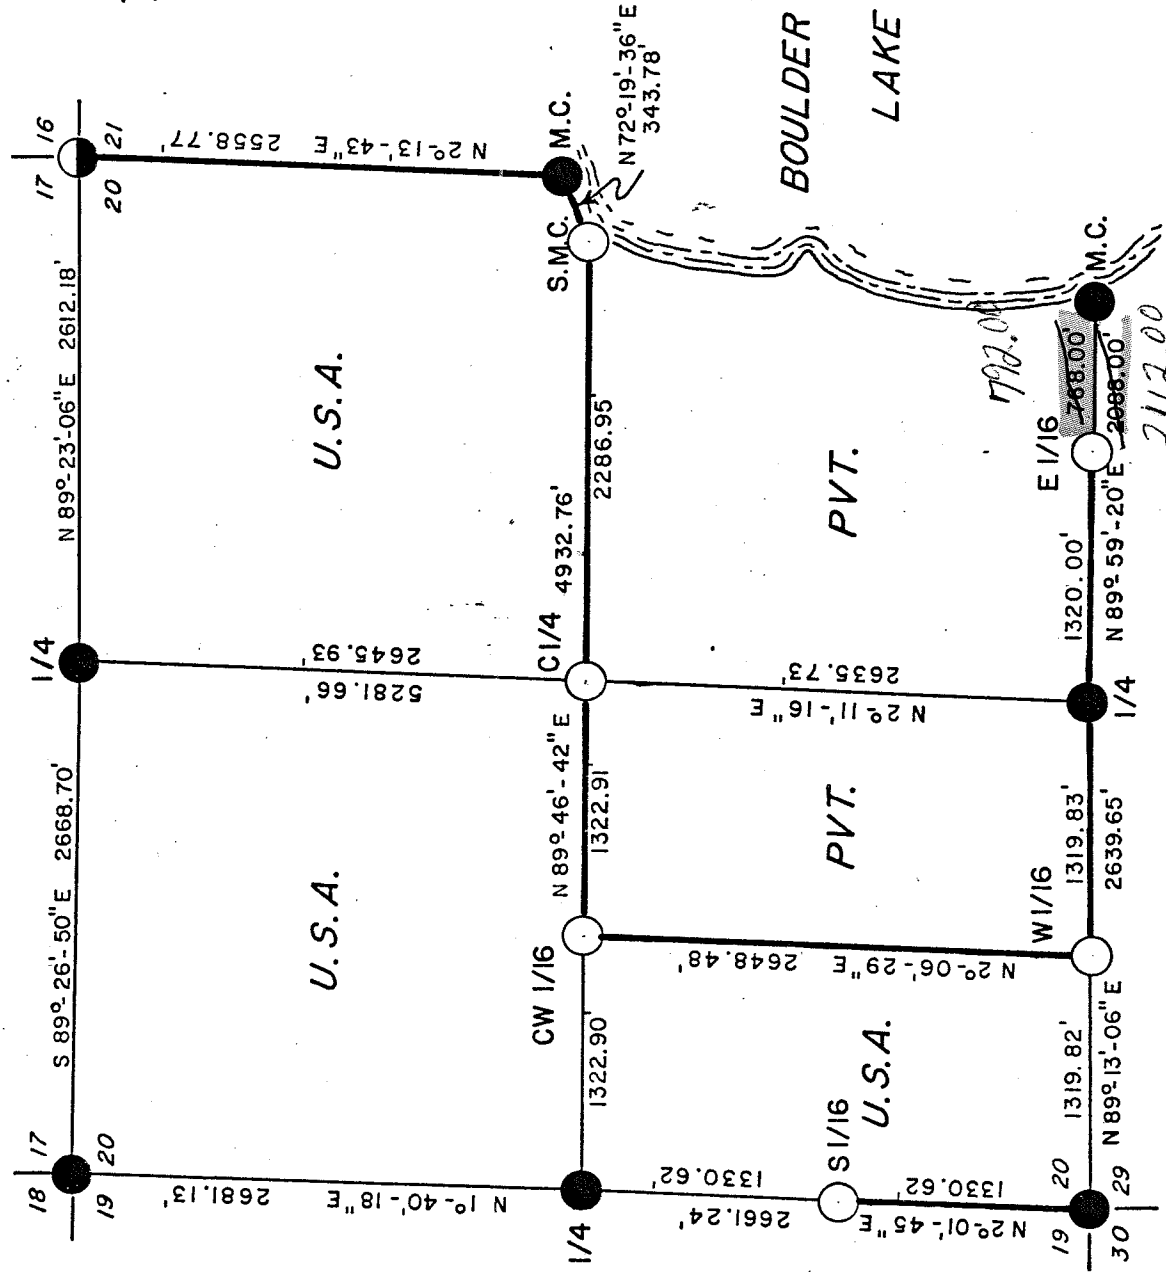

— LEGEND —

Conversion Factors:

Feet to Meters .304801
Meters to Feet 3.280833

U.S.F.S. IRON PIPE BRASS CAP

U.S.F.S. ALUMINUM PIPE WITH 3" ALUMINUM TABLET

ALUMINUM PIPE WITH 3" ALUMINUM TABLET SET
THIS SURVEY.

BOUNDARY U.S. GOVERNMENT LAND, MARKED & POSTED
TO U.S.F.S. STANDARDS.

RECORD # 10349
LANGLADE COUNTY SURVEYORS OFFICE
DATE FILED: 12/7/93 BY: DT

Dona Jay Kip Soder under FS Contract