
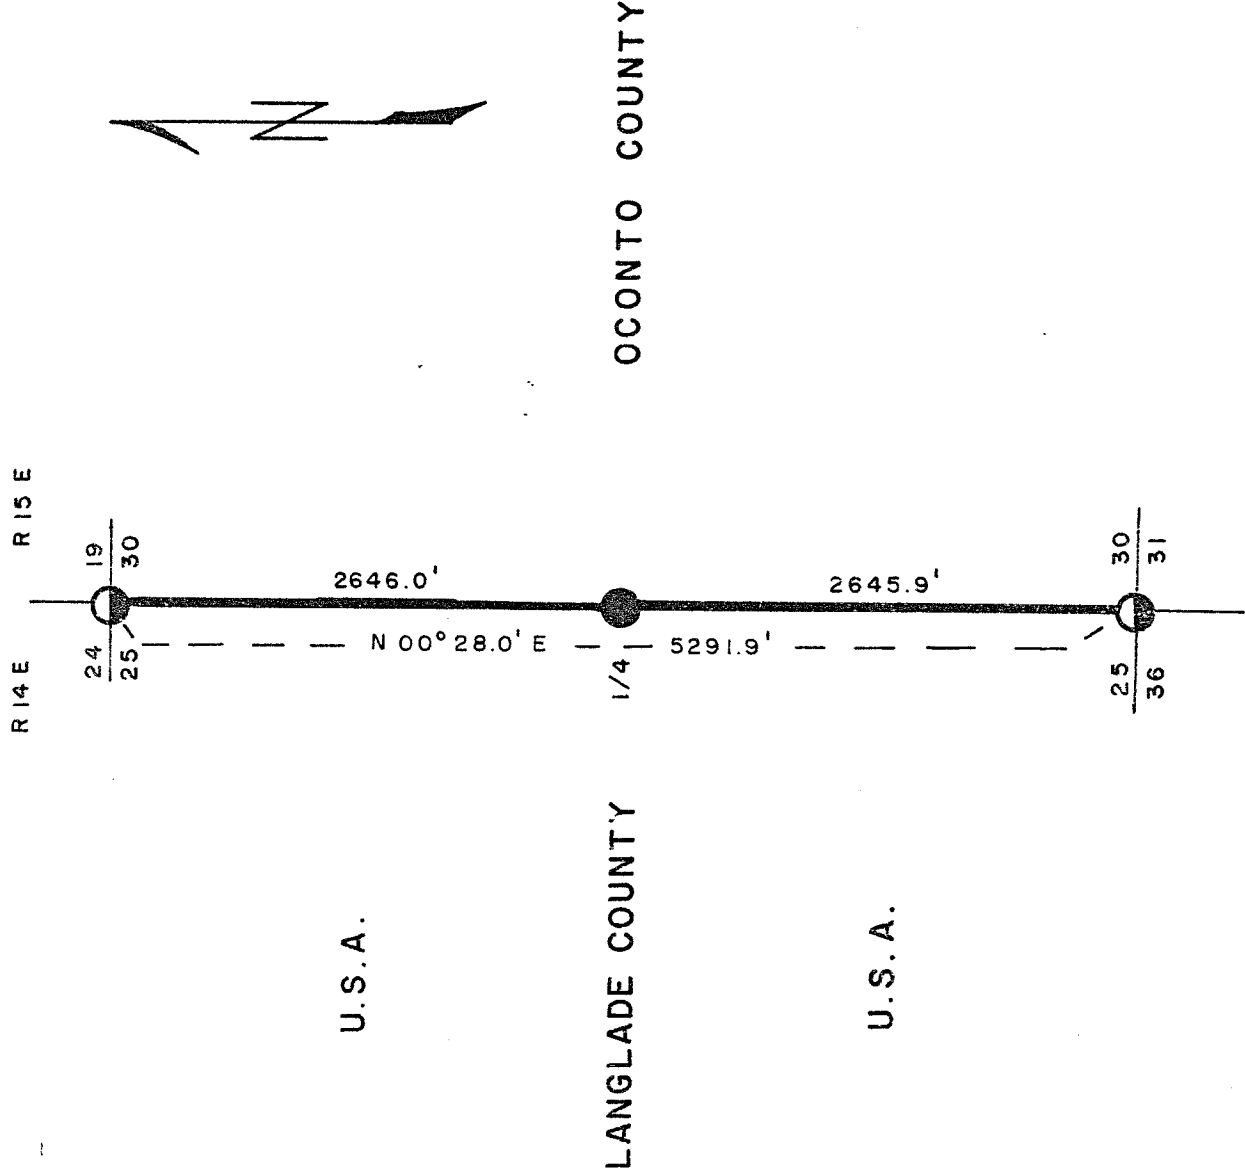


Stock No. 26273

SHEET 1 OF 3

CERTIFIED LAND CORNER RESTORATION

Being Section Corners to Sections 24-25-19-30; 25-36-30-31;
and the Quarter Corner to Sections 25-30
Township 33 North, Ranges 14-15 East, Fourth Principal Meridian,
LANGLADE AND OCONTO COUNTIES, WISCONSIN.



LEGEND

- Aluminum Monument, 60" Long
- Aluminum Monument, 30" Long
- Marked Boundary Line of U.S. Government Land

RECORD # 10357
LANGLADE COUNTY SURVEYORS OFFICE
DATE FILED: 7/27/93 BY: DT.

Oconto County
Doc # 349682
5/10/85
MES

Stock No. 26273

Sheet 2 of 3

SURVEY NOTES

This survey was made by the U. S. Department of Agriculture, Forest Service, for the purpose of restoring and establishing corners on the perimeter of Sections 25 and 30, for establishing subdivisional corners within Sections 25 and 30, and for locating and marking the boundaries of U. S. Government land on the perimeter of Sections 25 and 30, Township 33 North, Range 14-15 East, Fourth Principal Meridian, Langlade and Oconto Counties, Wisconsin.

The U. S. Government lands in these sections were acquired in 1945.

The original Government subdivision survey of this township was made in 1857.

The corner positions recovered, restored, and established by this survey are marked by the monument described in the map legend.

The corner positions established were located to an accuracy of one part in 3000.

The bearings between corner positions are true bearings as determined by solar observations.

The field notes of this survey and a copy of this plat are on file in the Forest Supervisor's Office at Rhinelander, Wisconsin.

CORNERS RECOVERED AND RESTORED

1. Section Corner to Sections 24-25-19-30, T.33N., R.14-15E.
 Corner position found marked by a post hole with original Sugar Maple remains bearing N.68°E., 23 links and Hemlock remains, N.23°W., 24 links. Also, a location poster on a Sugar Maple placed by Nels Sandberg in the 1930s.

Corner References:

Sugar Maple	8"	N.74°E.	29.54	feet
Sugar Maple	6"	S.52°E.	44.21	feet
Bitternut	8"	S.43°W.	30.42	feet
Hickory				
Sugar Maple	7"	N.59°W.	8.82	feet
Steel Sign Post		Southwest	1.40	feet

2. Section Corner to Sections 25-36-30-31, T.33N., R.14-15E.
 Corner position found marked by a 1" x 2" x 6' iron pipe in a mound of stone with original Hemlock stumps, S.18°E., 47 links, and S.72°W., 67 links, and N.20°W., 36 links.

Corner References:

Sugar Maple	9"	N.27°E.	31.91	feet
Yellow Birch	6"	S.52°E.	13.72	feet
Yellow Birch	6"	S.42°W.	13.98	feet
Red Oak	10"	N.63°W.	4.83	feet
Steel Sign Post		Southwest	2.00	feet

Stock No. 26273

Sheet 3 of 3

- 7-25 3. Quarter Corner to Sections 25 and 30, T.33N., R.14-15E.
 Corner restored by single proportionate measure between section corners
 1/2 mile north and south.
 Corner References:

Black Ash	7"	N. 66° E.	63.98	feet
Hemlock	7"	S. 32° E.	48.42	feet
Hemlock	15"	N. 30° W.	35.96	feet
Steel Sign Post		South	3.00	feet

SURVEYOR'S AFFIDAVIT

State of Wisconsin]
 Counties of Langlade and Oconto] SS

I, Milo E. Stefan, Cadastral Surveyor, U. S. Forest Service and a registered surveyor in the State of Wisconsin, hereby certify that I have surveyed Sections 25 and 30, Township 33 North, Range 14-15 East, Fourth Principal Meridian, State of Wisconsin.

The plat map and the notes herewith are a correct representation of the land surveyed and divided. I have surveyed and subdivided said section in accordance with the rules for survey of the public lands and with the statutes of the State of Wisconsin.

Milo E. Stefan

Cadastral Surveyor, U. S. Forest Service
 R.L.S., State of Wisconsin
 Certificate S-1558

Plat Ready For Filing: *De. S. Stefan*
 District Ranger

Date of Survey: 1980