

original to A-4

FORM NO. 985-A

K.C. Miller Company
Surveyors - Wisconsin

Stock No. 26273

SHEET 1 OF 4



CERTIFIED LAND CORNER RESTORATION and ESTABLISHMENT

RECORD # 10364

LANGLADE COUNTY SURVEYORS OFFICE


DATE FILED: 1/4/94 BY: D. TUSTY

BEING THE CORNERS ON THE SOUTH AND WEST SECTION LINES
OF SECTION 31 AND THE SOUTH SECTION LINE OF SECTION 32 ALL IN
TOWNSHIP 34 NORTH, RANGE 14 EAST, FOURTH PRINCIPAL MERIDIAN,
FOREST COUNTY, WISCONSIN



LEGEND

- 4" LANGLADE COUNTY MONUMENT
- 2" ALUMINUM MONUMENT, 36" LONG
- RAILROAD SPIKE IN SURFACE OF STATE HIGHWAY "52"
- MARKED PROPERTY BOUNDARY OF U.S. GOVERNMENT LANDS

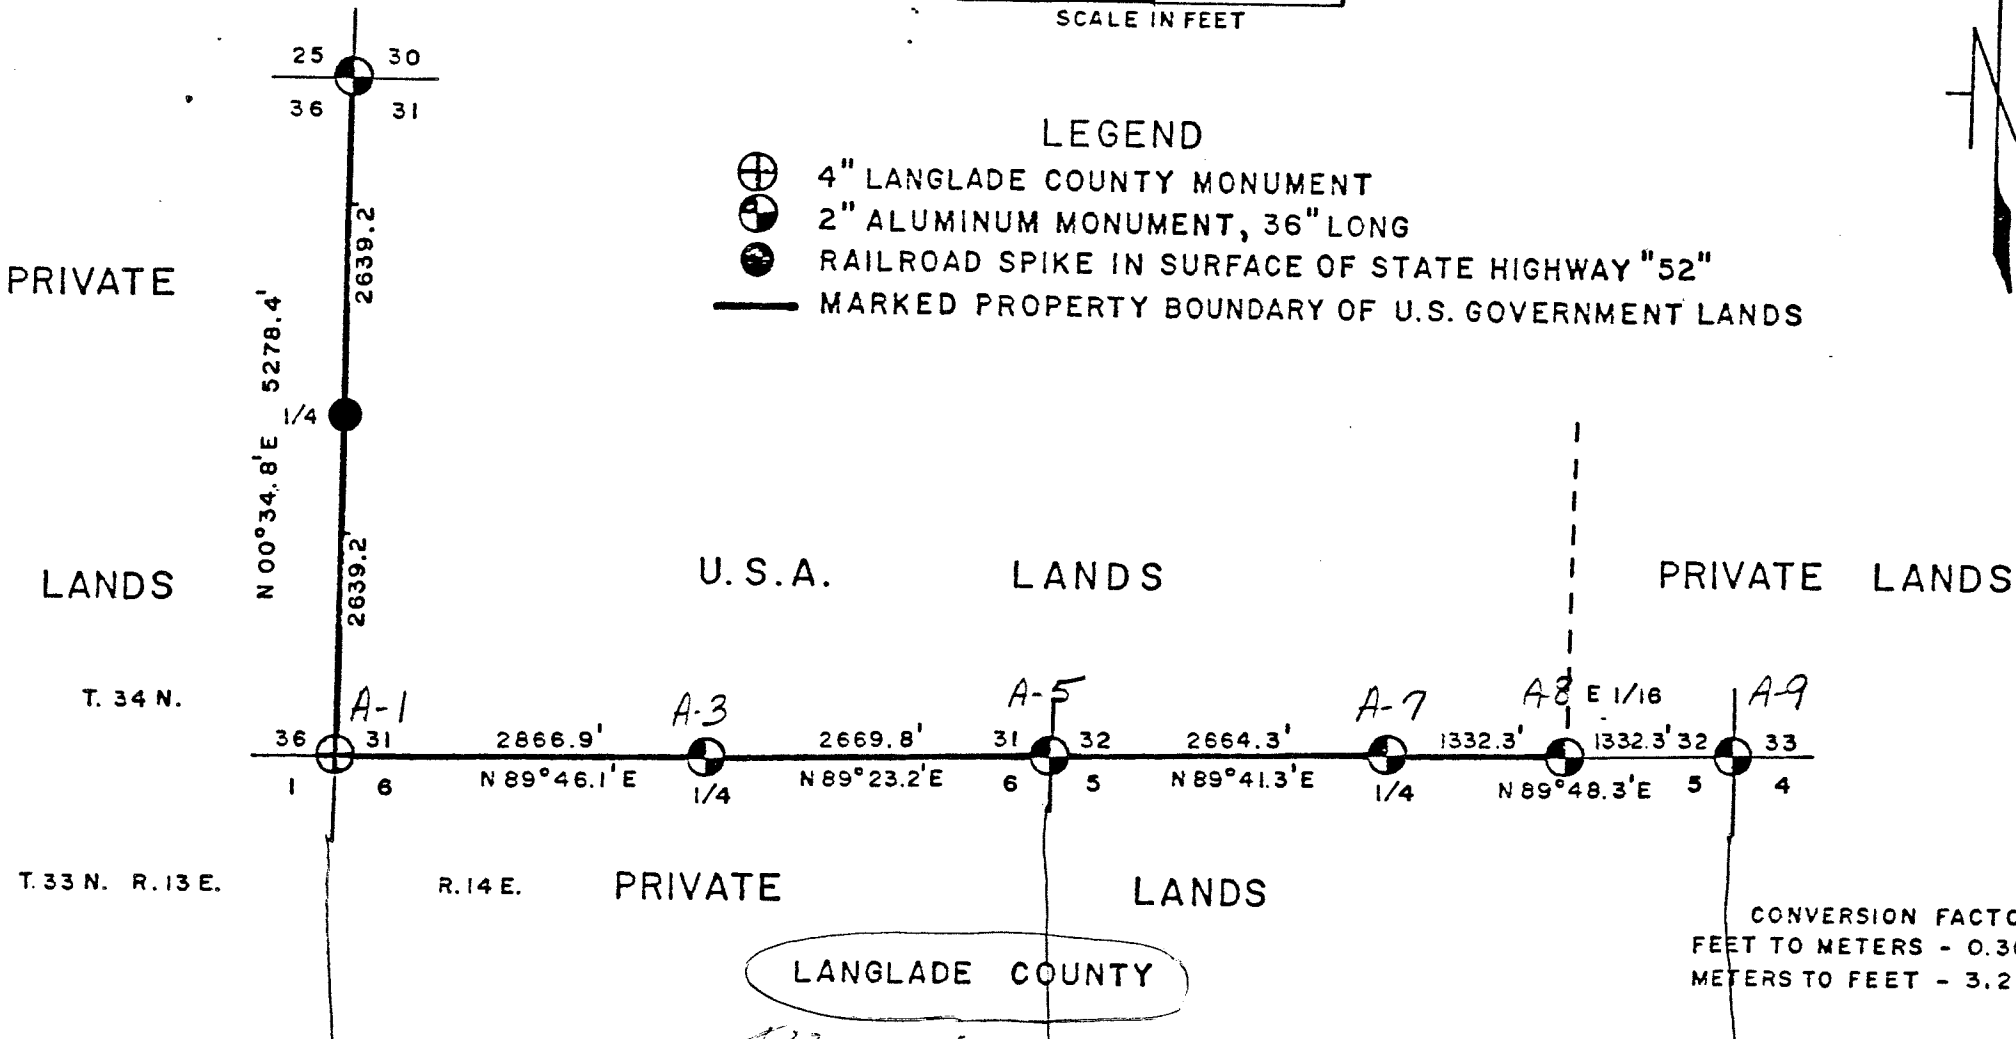

CONVERSION FACTOR
FEET TO METERS - 0.304801
METERS TO FEET - 3.28083

Stock No. 26273

SURVEY NOTES

This survey was made by the U. S. Department of Agriculture, Forest Service, for the purpose of restoring and establishing corners on the perimeter of Sections 31 and 32 and for locating and marking the boundaries of U. S. Government land on the perimeter of Sections 31 and 32, Township 34 North, Range 14 East, Fourth Principal Meridian, Forest and Langlade Counties, Wisconsin.

The original Government survey of this township was made in 1857 - 1859. Subsequent survey by Neal Spearhake in 1964.

The corner positions recovered, restored, and established by this survey are marked by the monument described in the map legend.

The corner positions established were located to an accuracy of one part in 3000.

The bearings between corner positions are true bearings as determined by solar observations.

The field notes of this survey and a copy of this plat are on file in the Forest Supervisor's Office at Rhineland, Wisconsin.

CORNERS RECOVERED AND RESTORED

A-1

1. Township Corner to T.33-34N., R.13-14E.
Corner position found marked by a 4" Langlade County monument, from which the remains of the original BTs were recovered.

Corner References:

White Spruce	14"	N.39°E.	123.26	feet
White Spruce	8"	N.87°E.	76.80	feet
Power Pole #3313-1E1		S.33°W.	63.41	feet
Red Maple	6"	N.83°W.	70.98	feet

2. Section Corner to Sections 30, 31, 25, and 36, T.34N., R.13-14E.
Corner position restored from the remains of the original bearing trees and post hole.

Corner References:

Sugar	8"	N.83°E.	44.67	feet
Sugar	4"	S.41°E.	33.65	feet
Sugar	4"	S.01°W.	12.40	feet
White Ash	8"	N.24°W.	10.70	feet
Steel Sign Post		South	1.10	feet
Kimberly Clark Monument		N.74°E.	31.84	feet

A-5

3. Section Corner to Sections 31, 32, 5, and 6, T.33-34N., R.14E.
Corner position restored from remains of the original bearing trees.

Corner References:

Balsam	8"	N.36°E.	30.60	feet
Aspen	6"	S.70°E.	27.30	feet
Balsam	3"	S.13°W.	6.70	feet
Balsam	7"	N.30°W.	15.26	feet
Steel Sign Post		West	1.87	feet
Kimberly Clark Monument		S.37°E.	5.80	feet

A-9

4. Section Corner to Sections 32, 33, 4, and 5, T.33-34N., R.14E.
Corner certificate on file.

Stock No. 26273

Sheet 3 of 4

5. Quarter Corner to Sections 36 and 31, T.34N., R.13-14E.
 Corner position restored by proportional measure between the section corner, 1 mile north, and township corner, 1 mile south. Corner falls in surface of State Highway "52" and is witnessed by 2" x 36" aluminum monuments as follows:
 Corner References:

<u>Witness Corner</u>		N.00°34.8'E.	51.88 feet
Sugar	10"	N.25°E.	28.45 feet
Sugar	5"	S.88°E.	8.30 feet
Sugar	7"	N.70°W.	24.69 feet
Steel Sign Post		North	1.20 feet
<u>Witness Corner</u>		S.00°34.8'W.	41.92 feet
Sugar	6"	S.65°E.	44.35 feet
Sugar	8"	S.04°E.	55.68 feet
Sugar	9"	N.89°W.	15.02 feet
Steel Sign Post		North	2.20 feet

- A-3 6. Quarter Corner to Sections 31 and 6, T.33-34N., R.14E.
 Corner position restored from the remains of the original bearing trees.

Corner References:

Sugar	10"	N.37°E.	48.39 feet
Basswood	6"	S.6°E.	13.84 feet
Sugar	7"	N.18°W.	35.18 feet
Steel Sign Post		East	2.30 feet

- A-7 7. Quarter Corner to Sections 32 and 5, T.33-34N., R.14E.
 Corner position found marked by a mound of stone with a post point in center and remains of original Hemlock stump at proper bearing and distance.

Corner References:

White Pine	8"	N.10°W.	80.08 feet
White Pine	6"	N.65°E.	45.98 feet
White Birch	7"	S.20°E.	37.51 feet
Steel Sign Post		West	1.80 feet

CORNERS ESTABLISHED

- A-8 1. East Sixteenth Corner to Sections 32 and 5, T.33-34N., R.14E.
 Corner established midpoint and on line between the south quarter corner and southeast corner of Section 32.
 Corner References:

White Pine	14"	N.72°E.	34.16 feet
Sugar	6"	S.50°W.	25.37 feet
Basswood	6"	N.58°W.	44.39 feet
Steel Sign Post		West	1.80 feet
White Pine Line Tree		West	86.34 feet

Stock No. 26273


Sheet 4 of 4

SURVEYOR'S AFFIDAVIT

State of Wisconsin
Counties of Forest and Langlade] SS

I, Milo E. Stefan, Cadastral Surveyor, U. S. Forest Service and a registered surveyor in the State of Wisconsin, hereby certify that I have surveyed the exterior lines of Sections 31 and 32, Township 34 North, Range 14 East, Fourth Principal Meridian, State of Wisconsin, as depicted on the plat map on Sheet 1.

The plat map and the notes herewith are a correct representation of the land surveyed. I have surveyed said sections in accordance with the rules for survey of the public lands and with the statutes of the State of Wisconsin.

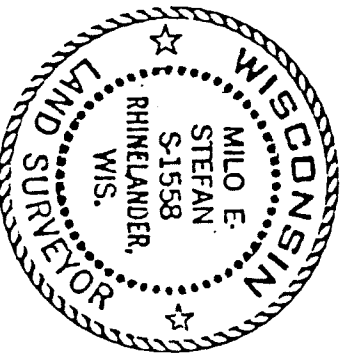

Milo E Stefan
Cadastral Surveyor, U. S. Forest Service
R.I.S., State of Wisconsin
Certificate S-1558

Plat Ready For Filing: Bole S. Hagg
District Ranger

Date of Survey: 1983

Doc # 127821

Forest County

4/15/85