
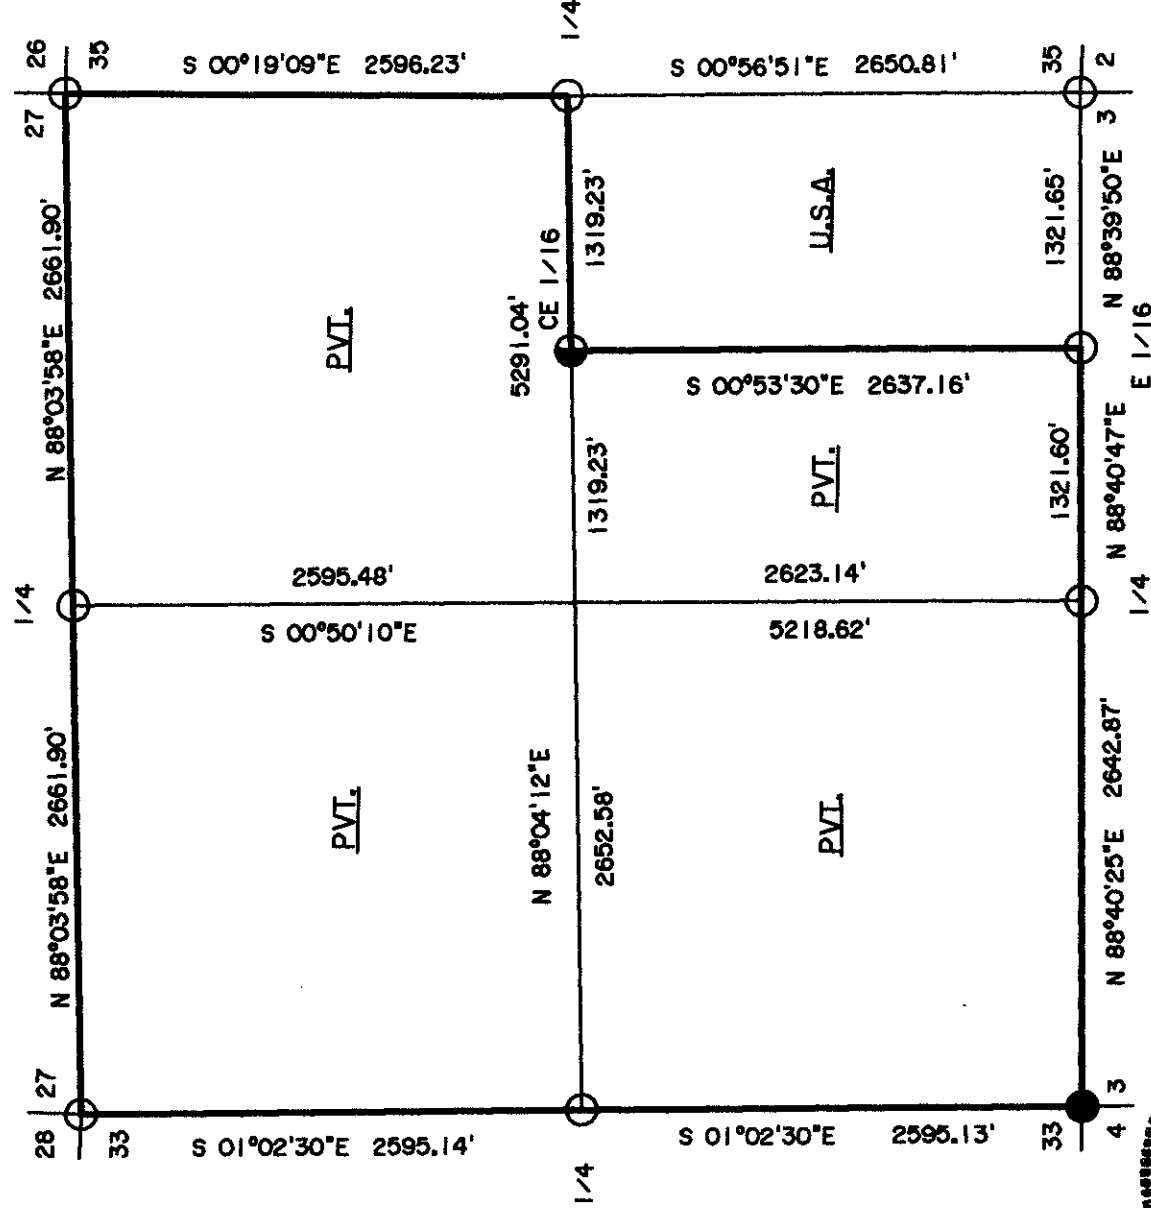


PLAT OF SURVEY

U.S. GOVERNMENT LANDS

BEING THE EAST 1/2 OF THE SOUTHEAST QUARTER
OF SECTION 34, TOWNSHIP 33 NORTH, RANGE 14 EAST,
FOURTH PRINCIPAL MERIDIAN, LANGLADE COUNTY,
WISCONSIN.

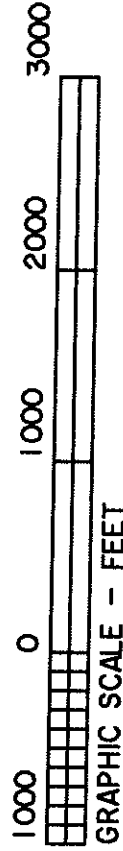


RECORD # 10639
LANGLADE COUNTY SURVEYORS OFFICE
DATE FILED: _____ BY: _____

LEGEND

- 2" BRASS CAPPED MONUMENT, FOUND IN PLACE.
- 2 1/2" ALUMINUM MONUMENT, FOUND IN PLACE.
- 1" X 36" ALUMINUM MONUMENT, SET THIS SURVEY.

MARKED PROPERTY BOUNDARY OF U.S. GOVERNMENT LANDS.

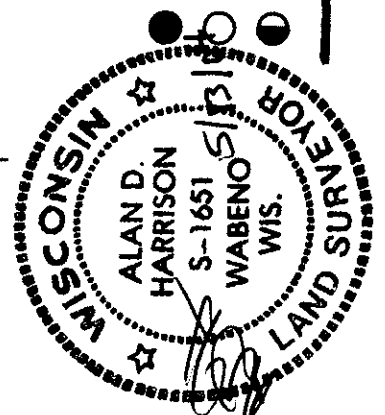

SURVEY NOTES

This survey was made by the U.S. Department of Agriculture, Forest Service, for the purpose of restoring and establishing corners of the perimeter of Section 34 for establishing subdivisional corners within Section 34 and for locating and making the boundaries of U.S. Government land on their perimeter and within Section 34, Township 33 North, Range 14 East, 4th Principal Meridian, Langlade County, Wisconsin.

The U.S. Government lands in Section 34 were acquired in 1936 and 1947.

The original government subdivision survey of this township was in 1857 and 1865.

The corner positions recovered, restored and established by this survey are marked by the monument described in the map legend.

The corner positions established were located to an accuracy of one part in 5,000.


The field notes of this survey and a copy of this plat are on file in the Forest Supervisor's Office at Rhinelander, Wisconsin.

Wisconsin Central Zone Coordinates were computed from G.P.S. observations in December 2002 and are based on 1983 North American Datum.

The bearings between corner positions are grid bearings based on the Wisconsin Central Zone State Plane Coordinate System.

Conversions between grid bearings and true bearings are performed by use of the following algebraic formula: True Bearing - Convergence Angle = Grid Bearing. (Close attention to the algebraic sign must be observed, i.e. + of the convergence angle.)

Grid distance shown are Wisconsin Central Zone State Plane grid distances. Conversion to surface distance is performed by the formula: (mean elevation of Section 34 = 1330')

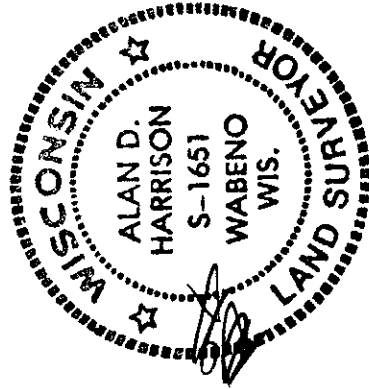

$$\begin{array}{rcl} \text{Grid Distance} & & = \text{Surface Distance} \\ \hline \text{Grid Scale Factor } X & 20,906,000 & \\ \hline & 20,906,000 + \text{Mean Elev.} & \end{array}$$

COORDINATE VALUES ON 1983 N.A.D.

Corner Code	North Latitude	West Longitude	Plane North	Coords.	
				East	
N.W.	45-18-21.04	88-44-26.04	539,346.95	2,292,530.14	
N 1/4	45-18-21.51	88-43-48.85	539,436.78	2,295,190.53	
N.E.	45-18-21.99	88-43-11.61	539,526.61	2,297,850.91	
W 1/4	45-17-55.41	88-44-25.99	536,752.24	2,292,577.33	
E 1/4	45-17-56.36	88-43-11.98	536,930.42	2,297,865.67	
S.W.	45-17-29.79	88-44-25.89	534,157.53	2,292,624.50	
S 1/4	45-17-29.99	88-43-48.92	534,218.71	2,295,266.67	
S.E.	45-17-30.18	88-43-11.95	534,279.98	2,297,909.21	
E 1/16	45-17-30.08	88-43-30.44	534,249.16	2,296,587.92	
C.E. 1/16	45-17-56.12	88-43-30.43	536,886.00	2,295,546.88	


CORNERS RECOVERED OR RESTORED

1. Corner Common to Sections 33, 34, 3 and 4, T.32-33 N., R.14E.
Corner found as monumented by William Cochrane, R.L.S. Certificate is on file in Langlade County Courthouse.
2. Corner Common to Sections 27, 28, 33 and 34.
Corner found as monumented by Alan Harrison, R.L.S. Certificate is on file in Langlade County Courthouse.
3. Corner Common to Sections 26, 27, 34 and 35.
Corner found as monumented by Alan Harrison, R.L.S. Certificate is on file in Langlade County Courthouse.
4. Corner Common to Sections 34, 35, 2 and 3, T.32-33 N., R.14E.
Corner found as monumented by Kim Pritzlaff, R.L.S. Certificate is on file in Langlade County Courthouse.
5. Quarter Corner Common to Sections 34 and 3, T.32-33 N., R.14 E.
Corner found as monumented by Kim Pritzlaff, R.L.S. Certificate is on file in Langlade County Courthouse.
6. Quarter Corner Common to Sections 33 and 34.
Corner found as monumented by Alan Harrison, R.L.S. Certificate is on file in Langlade County Courthouse.
7. Quarter Corner Common to Sections 27 and 34.
Corner found as monumented by Alan Harrison, R.L.S. Certificate is on file in Langlade County Courthouse.
8. Quarter Corner Common to Sections 35 and 34.
Corner found as monumented by Alan Harrison, R.L.S. Certificate is on file in Langlade County Courthouse.
9. East One-sixteenth Corner between Sections 34 and 3, T.32-33 N., R.14 E.
Corner found as monumented by Kim Pritzlaff, R.L.S. Certificate is on file in Langlade County Courthouse.

CORNERS ESTABLISHED

1. Center East One-Sixteenth Corner to Section 34.
Corner established at mid-point and on line between the East Quarter Corner and the Center Quarter Corner position of Section 34.
Corner References:

Basswood	8"	S.80°E.	5.00 feet
Sugar Maple	14"	N 5°E.	19.36 feet
Steel Sign Post		S.E.	0.43 feet

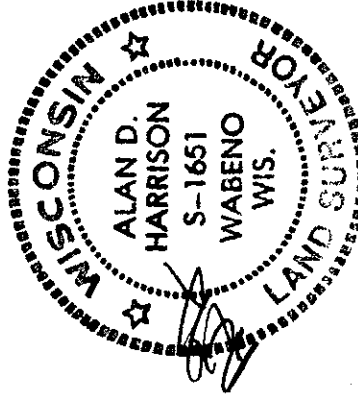



SURVEYOR'S AFFIDAVIT

State of Wisconsin]
County of Langlade]


I, Alan D. Harrison, Land Surveyor, U.S.D.A. Forest Service and a Registered Land Surveyor in the State of Wisconsin, do hereby certify that I have surveyed and subdivided Section 34, Township 33 North, Range 14 East, Fourth Principal Meridian, Langlade County, Wisconsin.

The plat map and the notes herewith are a correct representation of the land surveyed and divided. I have surveyed and subdivided said section in accordance with the rules for survey of the public lands and with the statutes of the State of Wisconsin.

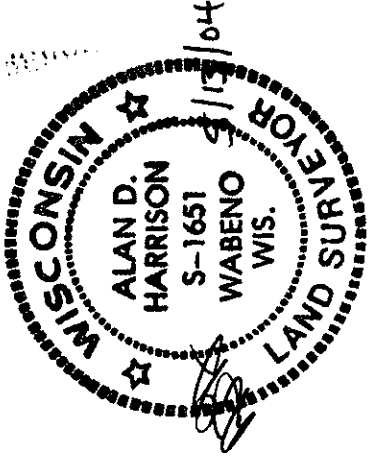


LAND SURVEYOR, U.S.D.A. Forest Service
R.L.S. Number S-1651
State of Wisconsin

Date of Survey: 2002/2003

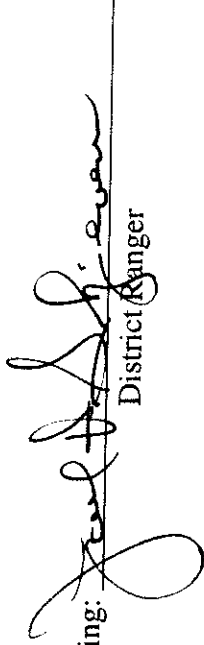Plat Ready for Filing: 
District Ranger